## Akova Wall

700WSAKV 1.0

# TECHLIGHTING

WALL COLLECTION

### **GENERAL PRODUCT INFORMATION:**



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with a low-voltage electronic dimmer.

This product can be mounted up or down.


This instruction shows a typical installation.

Install the Fixture

#### **CAUTION - RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°c supply conductors.

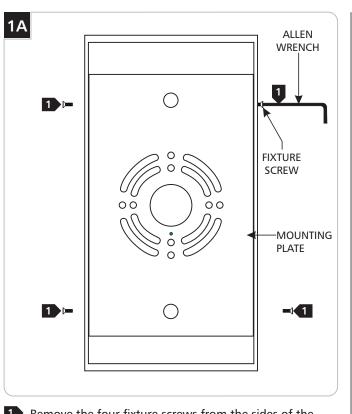


Remove the four fixture screws from the sides of the fixture using the provided Allen wrench.

2 Remove the mounting plate from the back of the fixture.



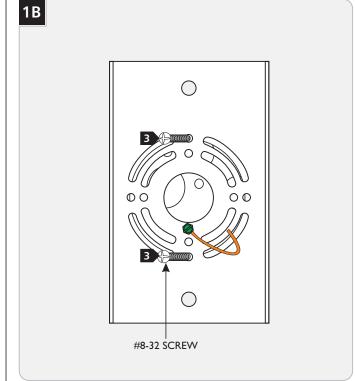

Attach the mounting plate to the electrical box using the two provided #8-32 screws.

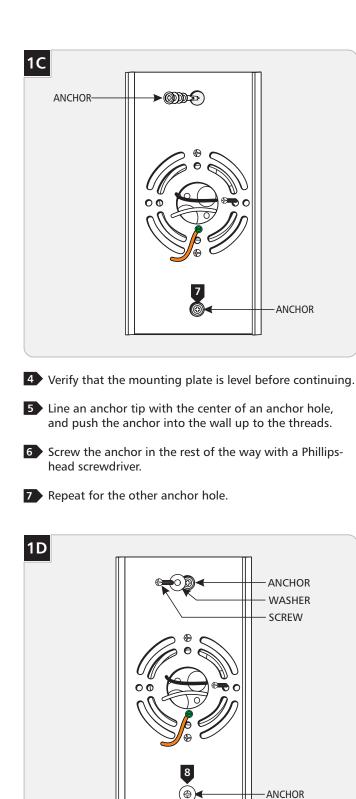

- Onnect the mounting plate ground wire to a suitable ground according to local electrical codes.
- O Connect the white driver wire to the neutral power line wire with a wire nut.
- 1 Connect the black driver wire to the hot power line wire with a wire nut.
- Properly place the driver. all wires, and wire nut connections into the electrical box.
- 13 Mount the fixture by sliding it back onto the mounting plate and reinstalling the fixture screws (reversal of figure 1A).

## SAVE THESE INSTRUCTIONS!



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company

Slide a #8 screw through a washer, and screw it into an anchor to secure the fixture base to the wall. Repeat for the other anchor.