

# Kisdon (LED)

700WSKISWW\_LED\_ 1.0



## GENERAL PRODUCT INFORMATION:

This fixture is intended to be installed utilizing NEC compliant junction boxes.

Suitable for damp locations.

This fixture may be dimmed with a low-voltage electronic dimmer.




**SAVE THESE INSTRUCTIONS!**

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


## Install the Fixture

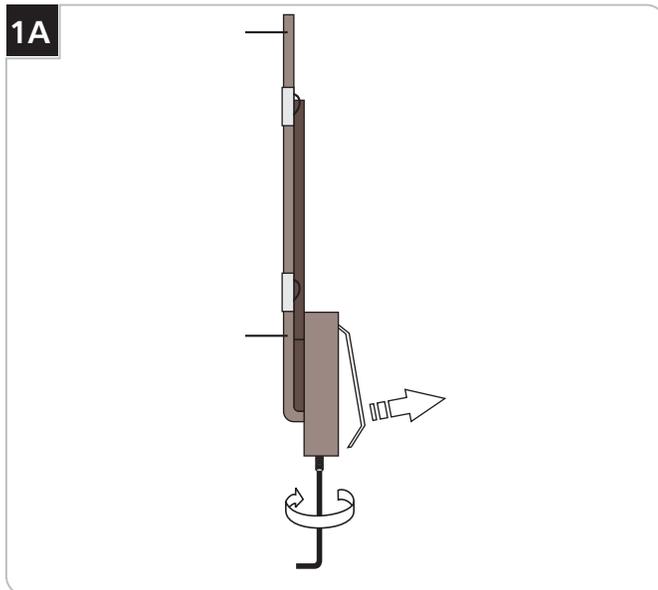


**1** Back out the set screw at the bottom of the fixture and remove the backplate.



**2** Screw the backplate to the electrical box.

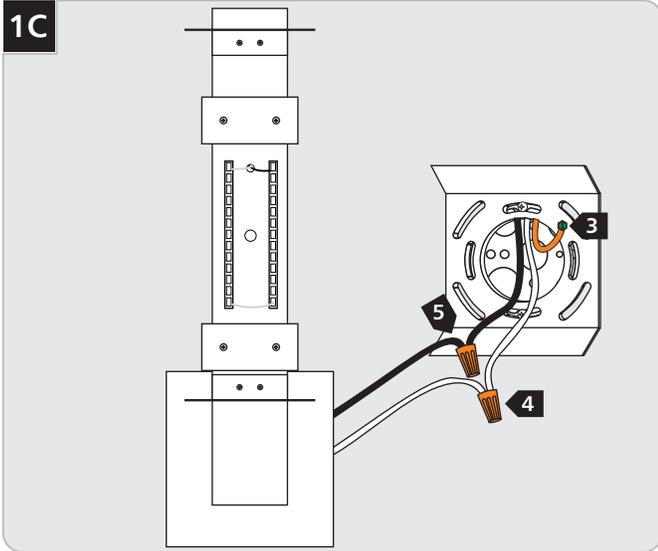


- 3** Connect the backplate wire to a suitable ground in accordance with local electrical codes.
- 4** Connect the white wire to the neutral power line.
- 5** Connect the black wire to the hot power line.

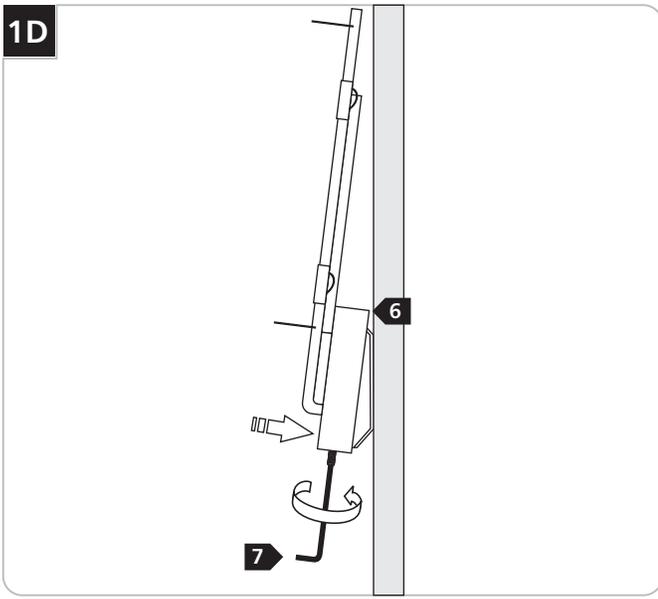


- 6** Hook the top of the fixture onto the backplate and place the fixture flush against the wall.
- 7** Tighten the screw at the bottom of the fixture.

## Install the Shade

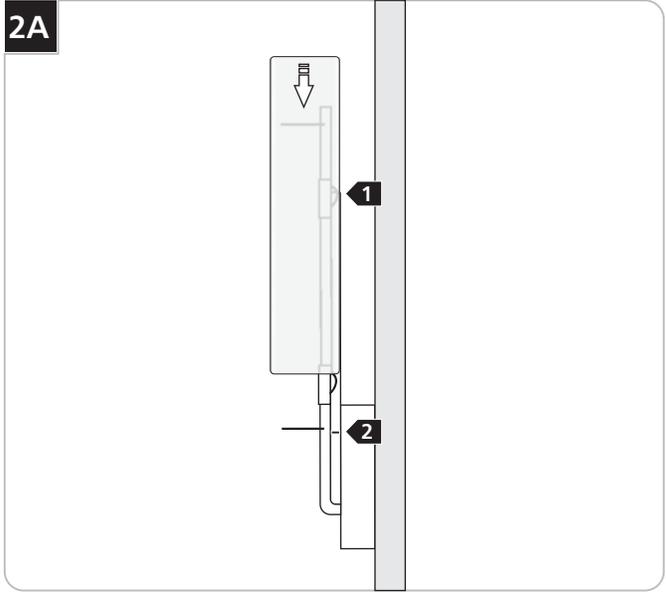

- 1** Line up the slot in the back side of the glass shade with the guide channel on the fixture.
- 2** Slide the glass shade all the way to the stop. If installing the fixture so the glass points downward, hold the glass in place with one hand until step 6 is complete.

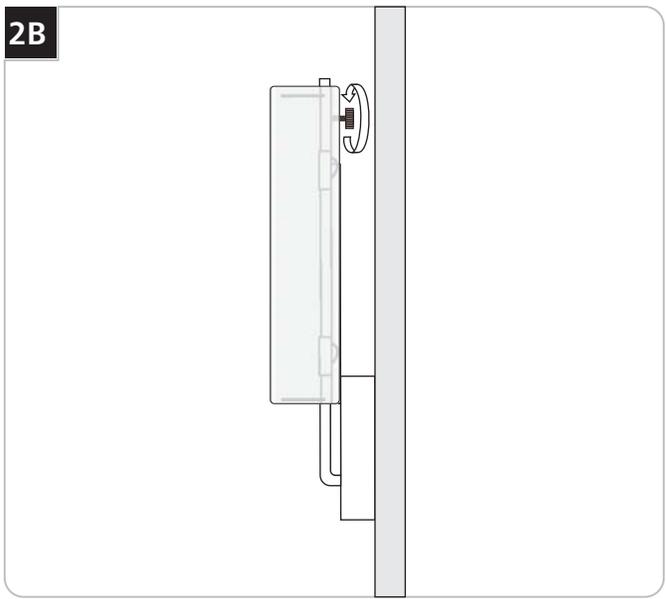

**NOTE:** Do not over tighten the thumb screw. Over-tightening may break the glass and cause injury.

- 3** Screw the thumb screw into the back of the fixture through the hole in the back of the glass shade.



7400 Linder Ave, Skokie, IL 60077  
847.410.4400

[www.techlighting.com](http://www.techlighting.com)

© 2015 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company