


## ASSEMBLY INSTRUCTIONS

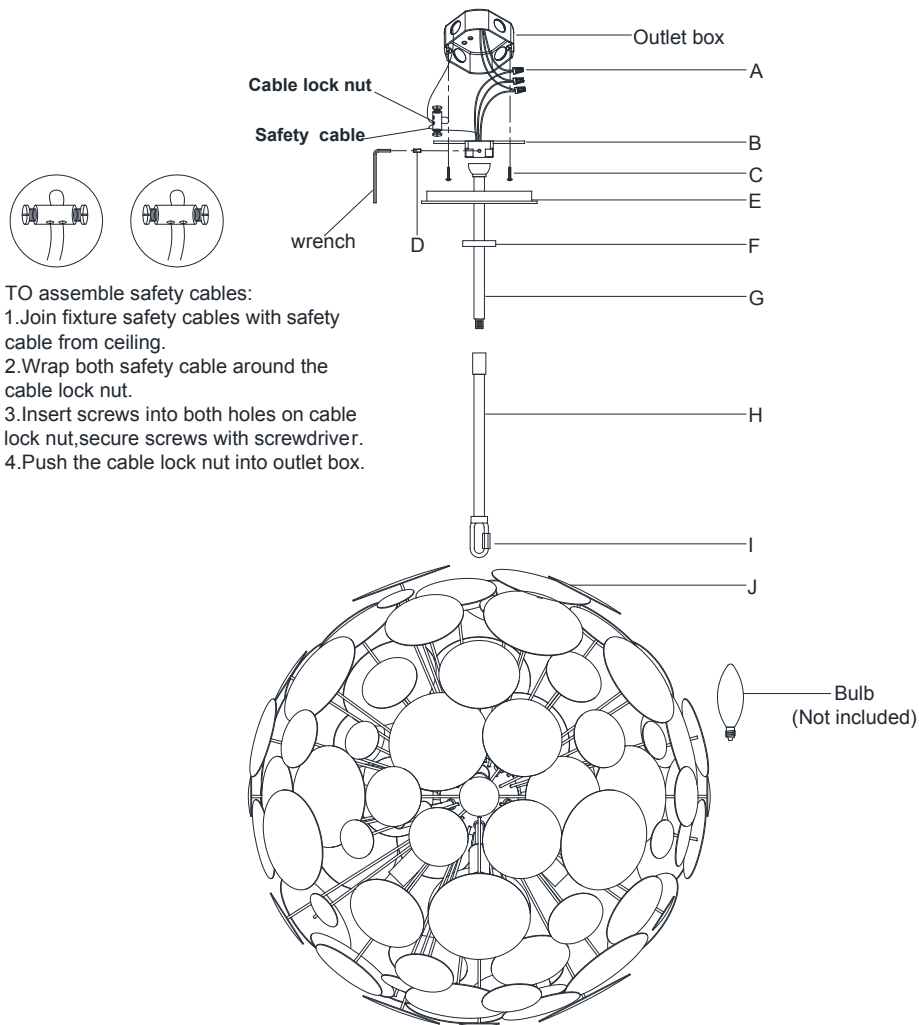

## Luna Medium Pendant

Item # JN 5063

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

1. Carefully remove all parts from the box.
2. Loosen the lock collar on the chain link (I), then attach it to the top of the fixture body (J) then secure the lock collar.
3. Thread the tube (G) to the tube (H) until it is fully secure.
4. Let the canopy (E) and lock collar (F) pass through the tube (G).
5. Affix mounting plate (B) onto the outlet box and secure with mounting screws (C).
6. Hang the tube (G) to the center of mounting plate (B) and secure with set screw (D) by using the wrench provided.
7. Cut the cord and ground wire leaving a minimum of 10" length beyond the canopy.
8. Attach the Ground wire from the fixture (green or bare copper) to the ground wire from the outlet box with plastic wire connector (A).

IT IS IMPERATIVE THAT THE FIXTURE IS GROUNDED.

9. Connect the Hot wire from the fixture (smooth edge, markings) to the hot wire from the outlet box. Fasten them together with a plastic wire connector (A).
10. Repeat this procedure for the Neutral wire from the fixture (ribbed, no markings) to the neutral wire from the outlet box.

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.


11. Tuck the wire connections neatly into the outlet box.
12. Attach canopy (E) to mounting plate (B), and secure with lock collar (F).
13. Insert bulbs (not included) into the sockets.
14. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



VISUAL COMFORT & Co. Est. 1987

## ASSEMBLY INSTRUCTIONS

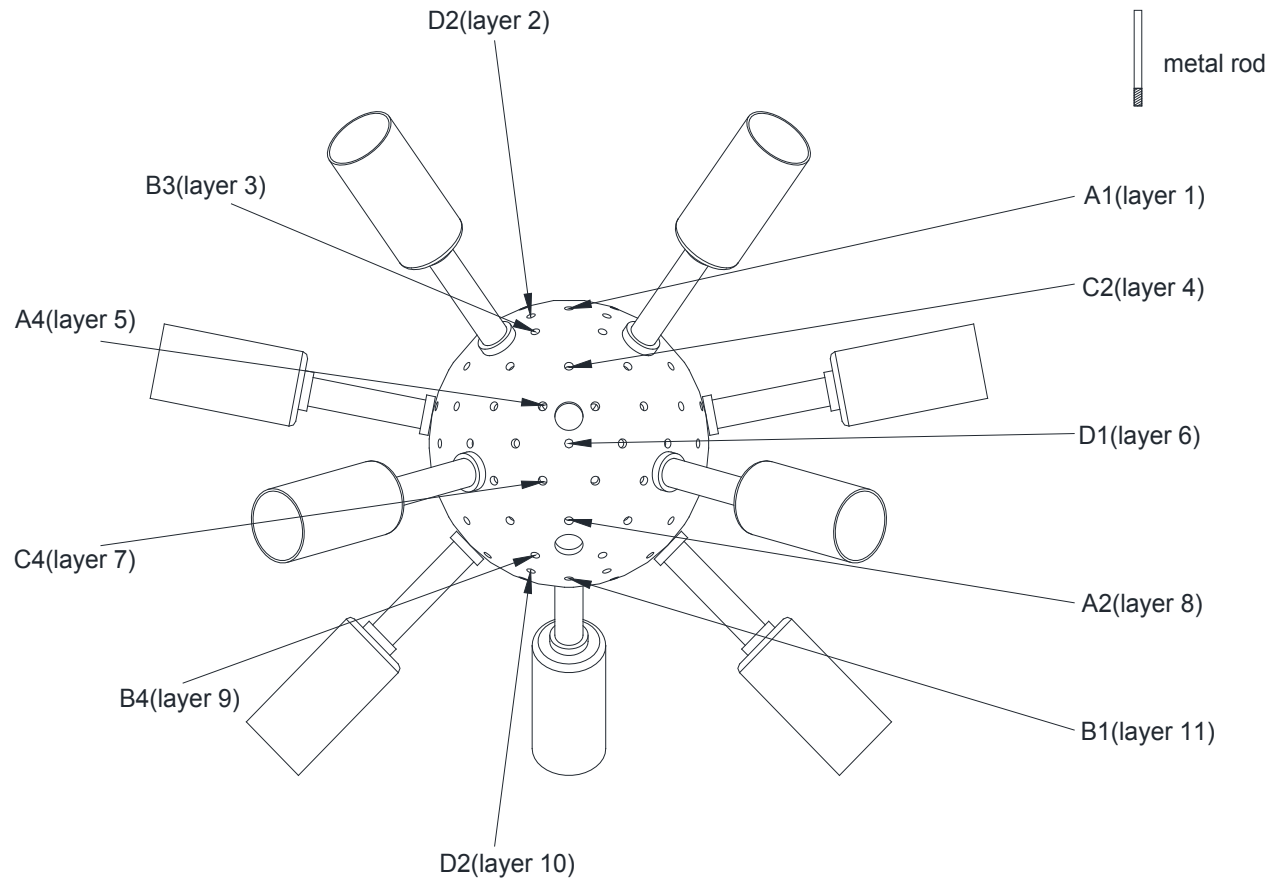

## Luna Medium Pendant

Item # JN 5063

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

To assemble the metal disk on to the Center ball:

- First, note that all the holes on the center ball are divided into 11 layers. Every hole on each layer is located on one horizontal line per layer.
  - Layer 1: start hole A1, total 5 holes.
  - Layer 2: start hole D2, total 5 holes.
  - Layer 3: start hole B3, total 8 holes.
  - Layer 4: start hole C2, total 12 holes.
  - Layer 5: start hole A4, total 16 holes.
  - Layer 6: start hole D1, total 16 holes.
  - Layer 7: start hole C4, total 16 holes.
  - Layer 8: start hole A2, total 12 holes.
  - Layer 9: start hole B4, total 8 holes.
  - Layer 10: start hole D2, total 5 holes.
  - Layer 11: start hole B1, total 5 holes.
- Second, On the center ball locate the hole start position for the five metal rods which are marked (A1,C2,D1,A2,B1). These are the start locations for each layer, DO NOT thread the rods on to the ball at this time.
- Third, On the center ball locate the hole start position for the 6 rod locations (D2,B3,A4,C4,B4,D2). See the diagram and reference locations (A1,C2,D1,A2,B1). Once all 11 start holes are located for each layer, you can start to assemble the metal disks from top to the bottom.


Attention:

- You must begin with the start holes for each layer and then assemble them one by one clockwise and follow the drawing layer detail.
- After you assemble all the metal disks for all 11 layers, you need to thread the last disk (D4) on to the center hole located at the bottom center.




VISUAL COMFORT & Co. Est. 1987


## ASSEMBLY INSTRUCTIONS

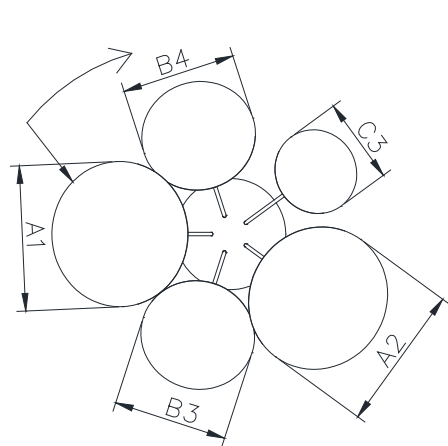

layer 1

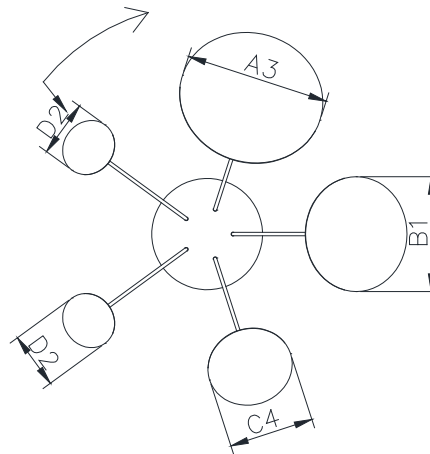

layer 2

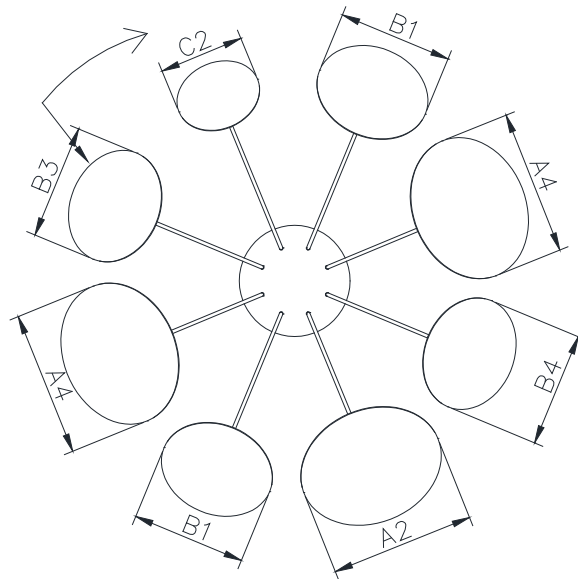

layer 3

## Luna Medium Pendant

Item # JN 5063

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**


For example:

1. Layer 1, Locate the threaded rod and disk labeled A1 and thread into the correct location on the center ball and repeat clockwise for that layer using the correct items.
2. Find the metal disk which is marked B4 and thread it to the center ball.
3. Find the metal disk which is marked C3 and thread it to the center ball.
4. Find the metal disk which is marked A2 and thread it to the center ball.
5. Find the metal disk which is marked B3 and thread it to the center ball.
6. Repeat the steps for each layer until the fixture is fully populated with the correct disk per layer.




VISUAL COMFORT & Co. Est. 1987


## ASSEMBLY INSTRUCTIONS

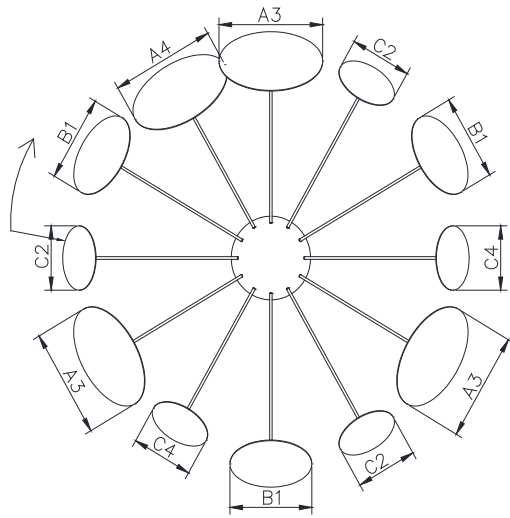

layer 4

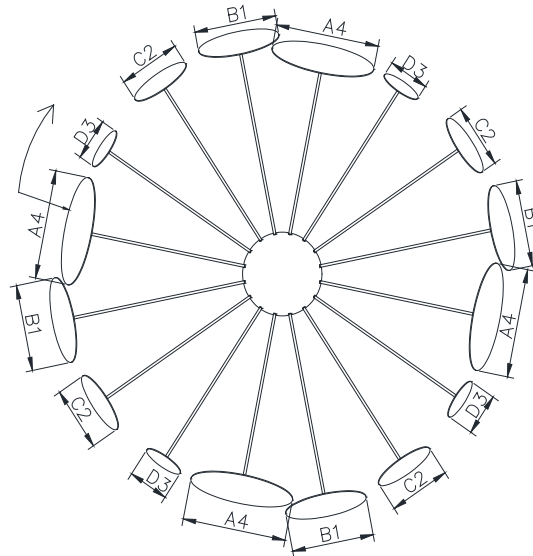

layer 5

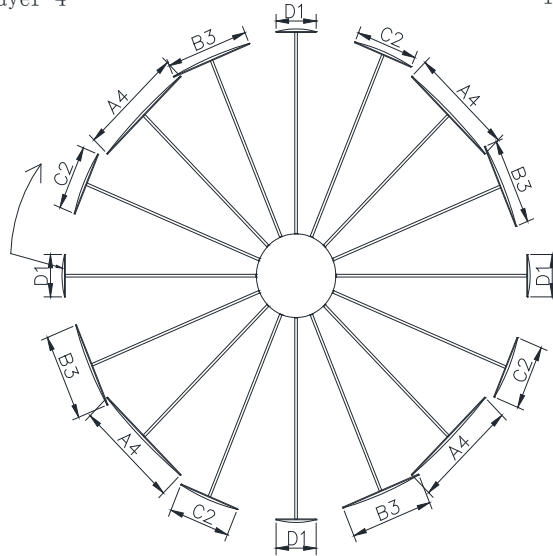

layer 6

## Luna Medium Pendant

Item # JN 5063

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**


**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**




VISUAL COMFORT & Co. Est. 1987


## ASSEMBLY INSTRUCTIONS

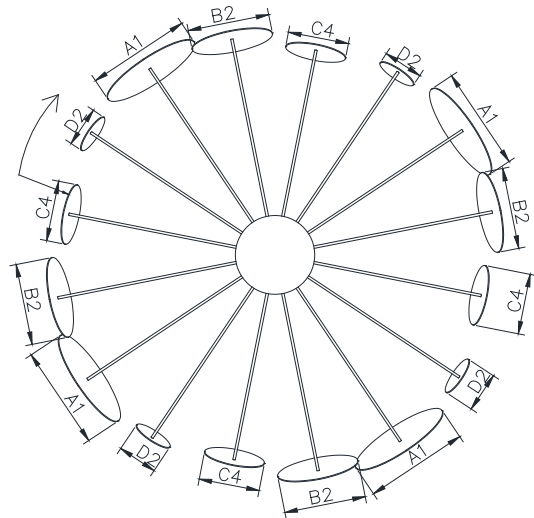

layer 7

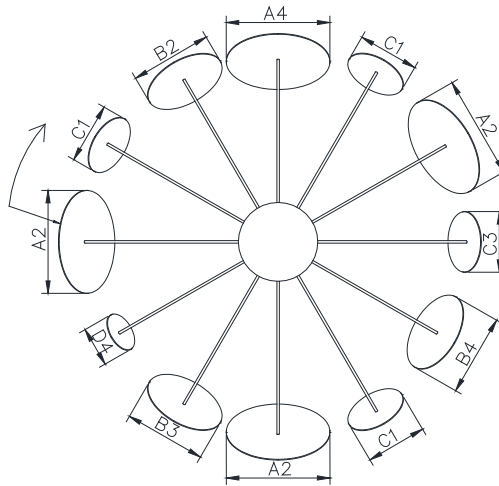

layer 8

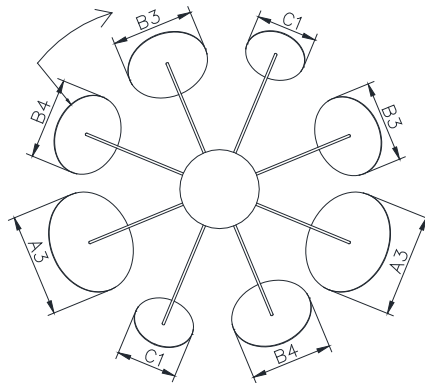

layer 9

## Luna Medium Pendant

Item # JN 5063

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**


**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**




VISUAL COMFORT & Co. Est. 1987

## ASSEMBLY INSTRUCTIONS

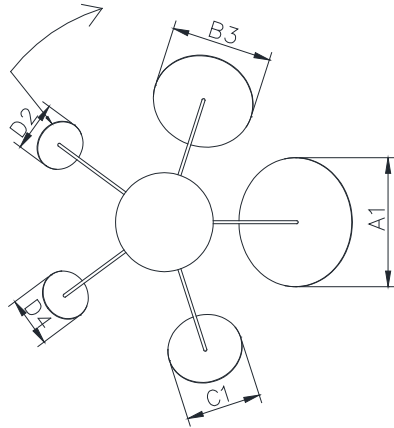

layer 10

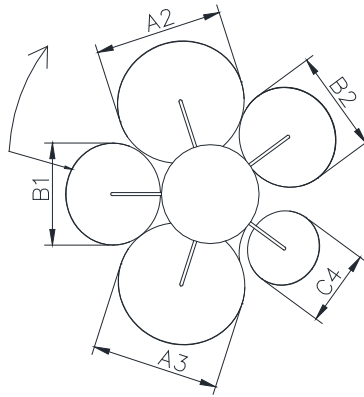

layer 11



center hole of the bottom

## Luna Medium Pendant

Item # JN 5063

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

---



VISUAL COMFORT & Co. Est. 1987