
ASSEMBLY INSTRUCTIONS



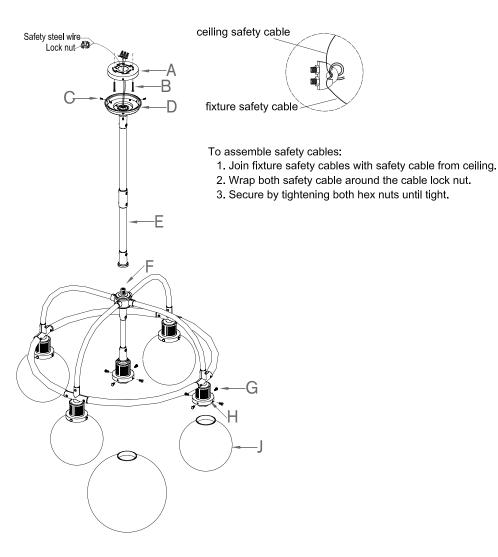

McCarren Single Tier Chandelier

Item # RL5470

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 1. Thread lamp pole (E) onto the top nipple (F) of light fixture.
- 2. Remove mounting plate (A) from base of light fixture (D) by removing base screws (C) in counter-clockwise direction.
- 3. Affix mounting plate (A) to ceiling outlet box with mounting screws (B) provided.
- 4. Attach fixture steel safety cable to structural member in the ceiling.
- Connect ground wire from the light fixture (bare copper) to ground wire (green
 or copper in color), fasten together with a plastic wire connector. Tightly wrap
 the wire from ceiling outet box with electrical tape. so the end of the connector
 is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE
 PROPERLY GROUNDED.
- Connect the hot wires (smooth wires) from the light fixture to the hot juction box wire from ceiling outle box (usually black). Fasten together with a plastic wire connector provided and tightly wrap wire connector with electrical tape.
- Repeat the procedure with neutral wires (ribbed wire) from the light fixture
 to the wire from ceiling outlet box (usually white). DO NOT REVERSE THE
 HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE
 COMPROMISED.
- 8. Attach fixture base (D) to the affixed mounting plate (A) and tighten with base screws (C).
- 9. Insert light bulbs (not included) into sockets.
- Loosen thumbscrews (G), insert glass shades (J) into shade holder (H) and secure by tightening thumbscrews (G). DO NOT OVERTIGHTEN OTHERWISE GLASS WILL BE DAMAGE.

^{***} Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.

