

RL2162


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

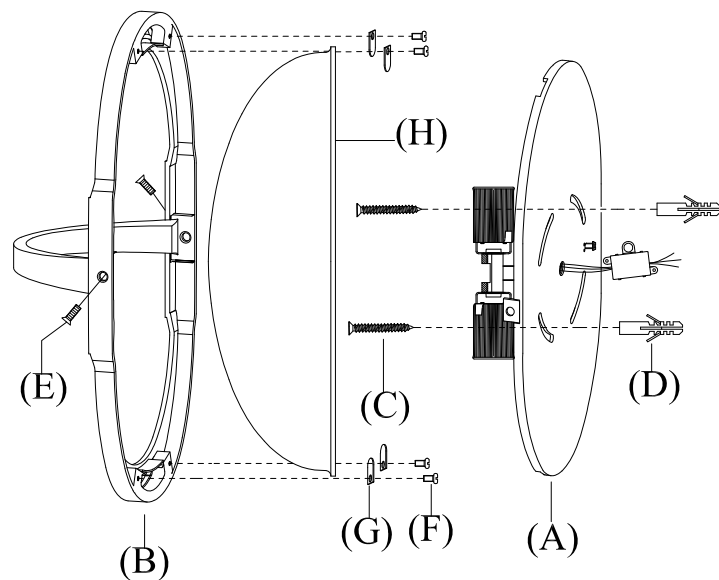

1. Remove shade cover (B) from fixture base (A) by unscrewing base screws (E).
2. Place fixture base (A) on the marked section on the wall, mark center location for two mounting slots on the fixture base (A). Remove fixture base (A).
3. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (D). Push plastic anchors (D) into the holes.
4. Gently pull the wires from the wall outlet and allow the wires to hang. Thread the wires through the center hole in mounting plate (A).
5. Affix fixture base (A) to the wall outlet by aligning mounting holes with center holes of plastic anchors (D), inserting mounting screws (C) to secure fixture base (A) to the wall.
6. Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (B).
7. Connect neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (B).
8. Repeat procedure for the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
9. Close the cap of terminal block.
10. Remove metal tabs (G) and bolts (F) from shade cover (B), join shade (H) and shade cover (B) together, aligning the holes and secure with metal tabs (G) and bolts (F).
11. Insert light bulbs (not include) into the lamp holders.
12. Attach shade cover (B) to fixture base (A), aligning the holes and secure base screws (E).
13. Restore power and test fixture. Installation is complete.

R A L P H L A U R E N