

# CHC1403


## ASSEMBLY & INSTALLATION GUIDE

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

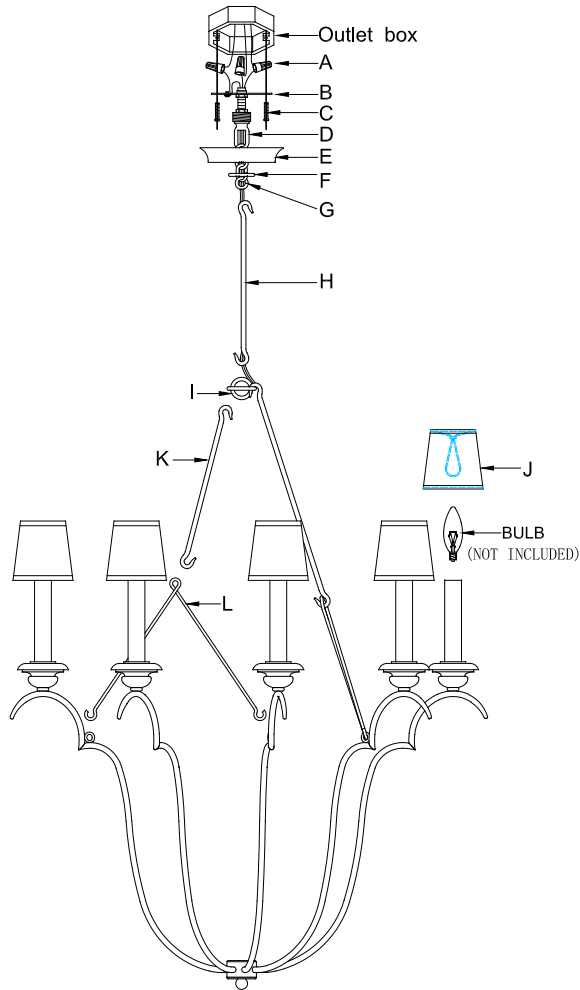

1. Install the crossbar(B) with ceiling loop(D) to ceiling outlet box by using mounting screws(C) provided.
2. Put canopy(E) to ceiling loop, and secure with lock collar(F).
3. Using the dimensions of the fixture as a guide, shorten the chain(G) as needed using a pair of chain pliers.
4. Take into consideration that you will use the chain end link to mount the chandelier once you have removed the excess chain.
5. Attach the chain to the ceiling loop(D). Attach the hook of(L) to fixture rings.
6. Put the bottom hook of(K) on the ring of(L) and top hoop on the ring(I).
7. Unwrap the wiring from the top of the fixture body, Weave the power supply cord and the ground wire through the hook(H) and the chain(G).
8. When you reach the canopy and ceiling loop, measure the wires and cut. Be certain to leave enough to connect inside the canopy.
9. Strip the insulation back on the two power supply wires about 5/8".
10. Loosen the collar ring(F), let the canopy(E) slip down the chain carefully.
11. Twist the power supply and ground wires together and push through the center hole in the ceiling loop.

### WIRING INSTRUCTION:

**DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**

12. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from your ceiling box using wire nut(A).  
If your house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.  
**IT IS IMPERATIVE THAT THE J-BOX IN YOUR HOME BE PROPERLY GROUNDED.**
13. Connect the Neutral fixture wire with the Neutral (usually white) wire from your ceiling box using wire nut(A).
14. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from your outlet box using wire nut(A).
15. Tuck these wire connections neatly into ceiling loop(D) to secure. Install the light bulbs (not included) into sockets.
16. Put canopy (E) to ceiling loop, and secure with lock collar(F). Clip the shade(J) on each bulb.
17. Installation is complete, turn on power at fuse or circuit breaker.