

# CHC 4132


## ASSEMBLY & INSTALLATION GUIDE

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

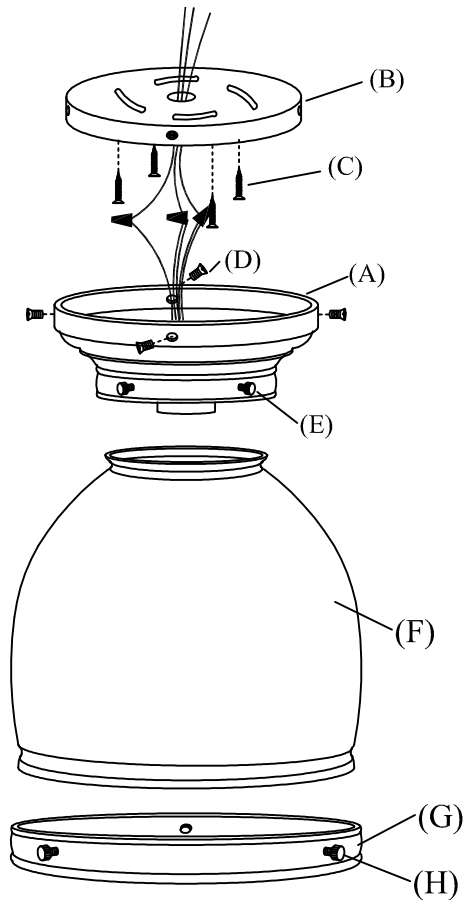

1. To remove back plate (B) from base (A), unscrew base screws (D) and set aside.
2. Connect the hot wires from the fixture (BLACK) to the hot junction box wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector provided and wrap connection with electrical tape.
3. Repeat this procedure for the WHITE neutral wires from the light fixture to the wire from the outlet box (usually WHITE).
4. Connect the ground wire from the light fixture (bare copper) to the ground wire from the outlet box.
5. Attach the back plate (B) to the outlet box and tighten it with screws provided (C).
6. Replace the base fixture (A) to the back plate(B),tighten it with base screws (D).
7. Insert light bulb into socket.
8. Loosen screws (E), insert bottom of glass shade (F) to the lamp base (A) and tighten with screws (E).
9. Loosen screws (H), then attach brass ring (G) to top of glass shade (F), and tighten with screws (H).

**\*\*\* Make sure screws are securely fastened. Failure to tighten screws properly may result in damage to fixture.**