


ASSEMBLY INSTRUCTIONS

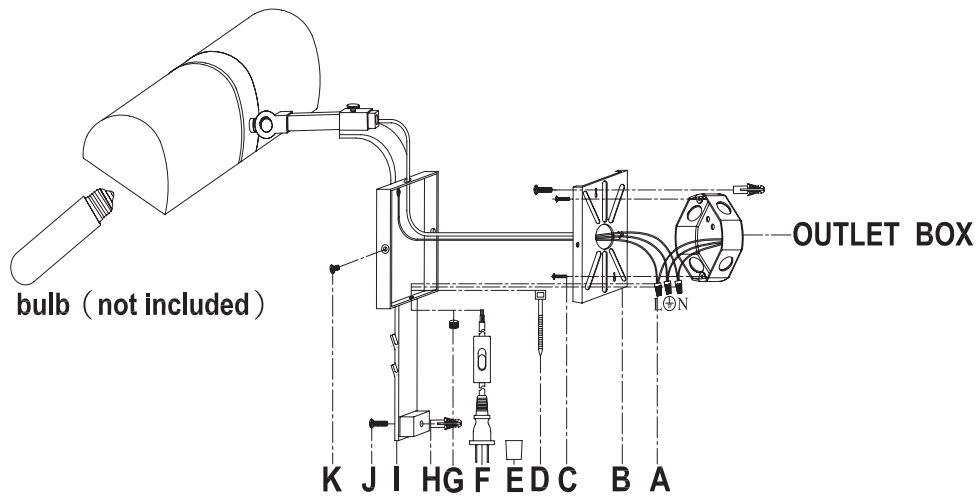

Furness Small Library Picture Light

Item # CHD 2781

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

FIXED PATTERN

1. Carefully remove all parts from the box.
2. Remove the mounting plate (B) from the fixture (I) by loosening the side screws (K).
3. Affix the anchors (H) to the wall.
4. Affix the mounting plate (B) to the outlet by the mounting screws (C).
5. Connect the fixture ground wire (bare) to ground wire from the outlet box using wire nuts (A). IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
6. Connect the fixture neutral wire (white) to neutral wire from the outlet box using wire nuts (A).
7. Connect the fixture hot wire (black) with hot wire from the outlet box using wire nuts (A).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Tuck these wire connections neatly into the outlet box to secure.
9. Letting the screws (J) pass the upper hole of backplate (B) and secure into the anchors (H).
10. Affix the fixture (I) to the mounting plate (B) using the side screws (K).
11. Let the screws (J) pass the hole on bottom stage and secure into the anchors (H).
12. Insert bulb (not included) into the socket.
13. Installation is complete, turn on power at fuse or circuit breaker.



VISUAL COMFORT & Co. Est. 1987

ASSEMBLY INSTRUCTIONS

Furness Small Library Picture Light


Item # CHD 2781

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

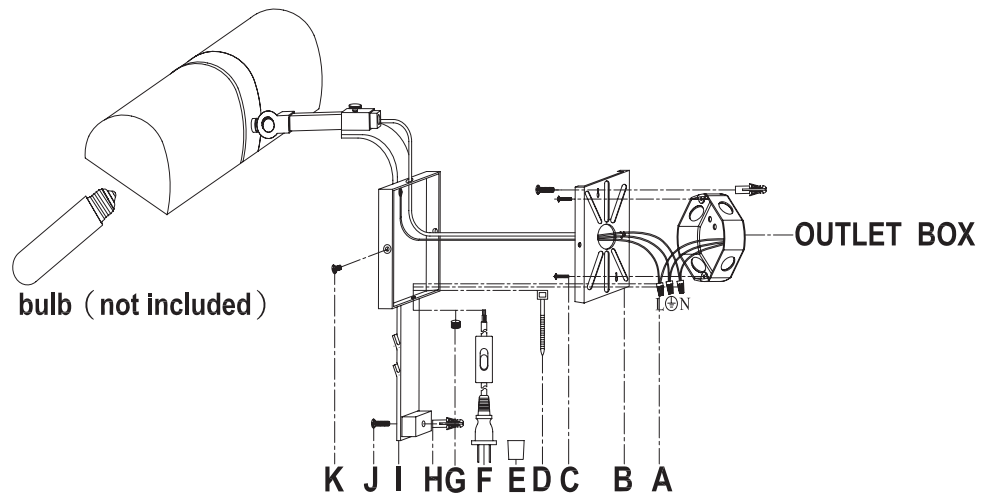

PORTABLE PATTERN

1. Carefully remove all parts from the box.
2. Remove the mounting plate (B) from the fixture (I) by loosening the side screws (K).
3. Pass the extra cord (F) into the bottom hole of the fixture backplate.
4. Connect the fixture neutral wire (white) to the neutral wire (ribbed, no markings) of extra cord (F) using wire nuts (A).
5. Connect the hote wire (black) from the fixture (I) to hot wire (smooth edge, markings) of extra cord (F) using wire nuts (A).
6. Wrap these wire connections together using tape buckle (D) to secure.
7. Affix mounting plate (B) to the fixture backplate by side screws (K).
8. Insert bulb (not included) into socket.
9. Installation is complete. turn on power at fuze or circuit breaker.

***Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.



VISUAL COMFORT & Co. Est. 1987