

MS5030


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

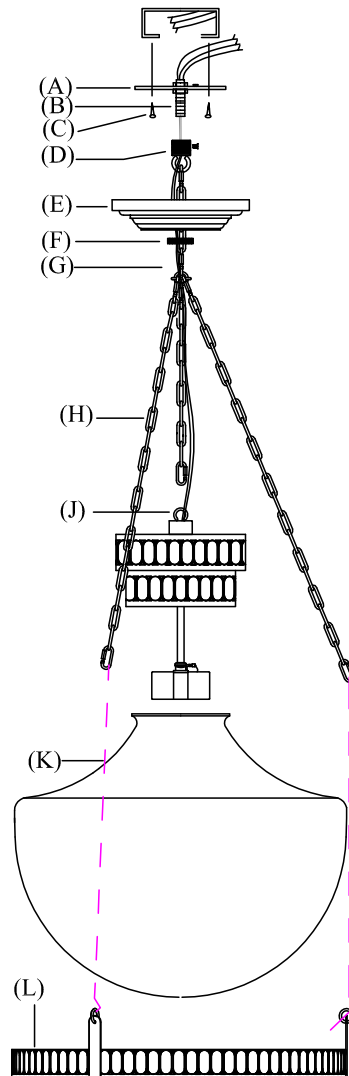

1. Feed wire through chain (G) and mounting loop (D). Unscrew canopy ring (F) and slide canopy (E) on chain.
2. Attach mounting strap (A) to mounting outlet box using mounting screws provided. Insert thread nipple (B) in mounting strap (A).
3. Attach chain mounting loop (D) to thread nipple using screws provided. Attach chain with fixture to chain mounting loop (D) at desired height.
4. Attach the ground wire (silver or brass in color) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded.
5. Connect the neutral wire from the fixture (ridged molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
6. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each a plastic wire connector and wrap the connection with electrical tape.
7. Be sure that no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
8. Tuck wire connections neatly into ceiling outlet box. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
9. Insert ONE light bulb into the one socket, insert socket with one light bulb installed into glass shade (K.), hold glass shade steadily, install another light bulb inside of glass shade by hand.
10. Raise metal ring (L) to hold glass shade (K.), attach three loops to end link of side chains (H) by opening/closing end link of side chain (H).
11. LIGHT BULB REPLACEMENT INSTRUCTIONS:
 1. Shut off the light and make sure the light bulbs are cooled down.
 2. Put one hand into glass shade (K), remove the old light bulb.
 3. Replace with NEW light bulb.