


RL14029

ASSEMBLY & INSTALLATION GUIDE

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

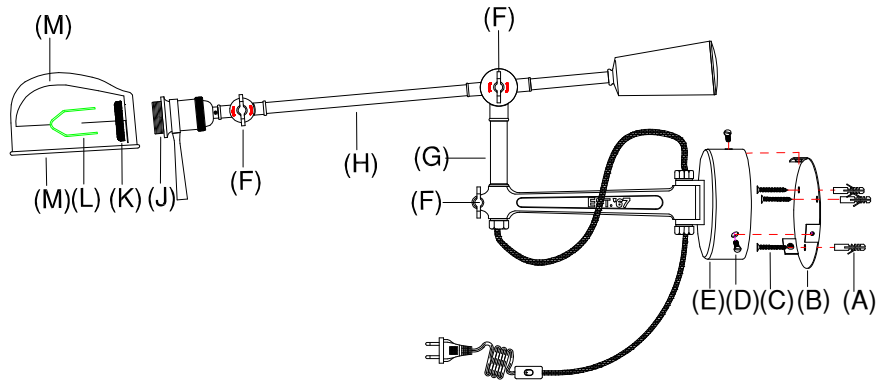

1. Remove mounting plate (B) from fixture base (E) by removing base screws (D).
2. Position mounting plate (B) on the wall in desired orientation and use it as a template, mark center points for three mounting holes of mounting plate (B) on the wall. Remove mounting plate (B).
3. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
4. Affix mounting plate (B) to the wall by aligning mounting holes with center holes of plastic anchors (A), inserting mounting screws (C) to secure mounting plate (B) to the wall.
5. Attach fixture base (E) to affixed mounting plate (B) by aligning the holes and secure by inserting base screws (D). Tighten with a screwdriver.
6. Remove threaded ring (K) from threaded section of lamp holder (J).
7. Place lamp shade (N) over threaded section of lamp holder (J), followed with light reflector (M), letting lamp holder (J) protrude the opening of the shade and light reflector. And secure with threaded ring (K) by fork (L) provided.
8. Plug lamp into wall outlet.
9. Insert light bulb into the lamp holder.
10. Restore power and test fixture. Installation is complete.
11. ADJUSTMENT INSTRUCTIONS
 - 1- Loosen adjustment keys (F), adjust lamp by swinging lamp arm (H), (G) or shade (N) to desired position.
 - 2- Tighten the adjustment keys (F).

R A L P H L A U R E N