
ASSEMBLY INSTRUCTIONS

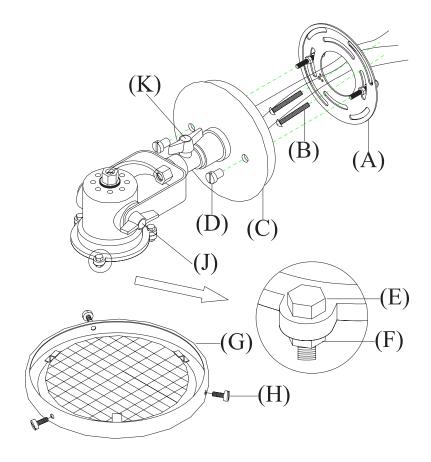

Fulton Small Sconce

Item # RL2120

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.


INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 1. Remove mounting plate (A) from fixture base (C) by removing cap nuts (D).
- Affix mounting plate (A) to wall outlet box and screw with mounting screws
 (B) provided.
- Attach ground (green) wire to ground wire from wall outlet box (usually green
 or copper in color), fasten together with a plastic wire connector. Tightly wrap
 the wire connector with electrical tape so the end of the connector is sealed.
 IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE
 PROPERLY GROUNDED.
- 4. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
- Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
 - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- 6. Attach fixture base (C) to mounting plate (A), letting threaded rods pass through the holes in fixture base (C). Secure with cap nuts (D).
- 7. Loosen hex nuts (F) from threaded rods (E), and attach lamp shade (not included) to threaded rods, letting threaded rods (E) pass through the holes of shade, and secure with hex nuts (F).



ASSEMBLY INSTRUCTIONS

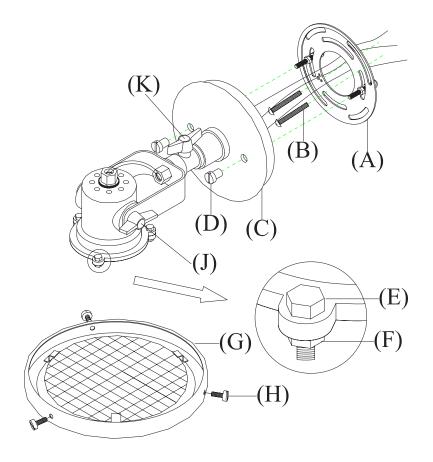

Fulton Small Sconce

Item # RL2120

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 8. Remove set screws (H) from assembly part (G).
- 9. Insert light bulb (not included) into socket.
- 10. Attach assembly part (G) to lamp shade (not included), and secure with set screws (H).

