

# RL2180


## ASSEMBLY & INSTALLATION GUIDE

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

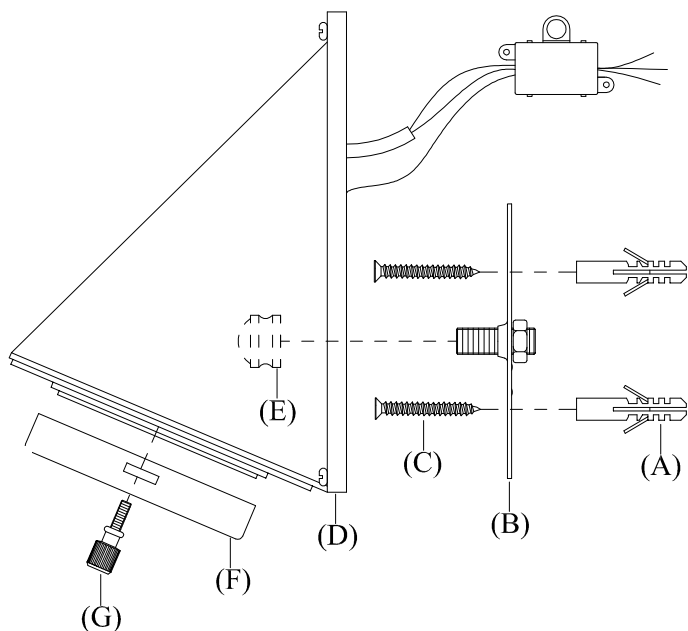

1. Remove mounting strap (B) from fixture base (D) by removing cap nut (E).
2. Place mounting strap (B) on the wall, use it as a template, and mark center points for both mounting slots for mounting strap (B) on the wall. Remove mounting strap (B).
3. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
4. Gently pull the wires from the wall outlet and allow the wires to hang. Thread the wires through the center hole in mounting strap (B).
5. Affix mounting strap (B) to the wall by aligning mounting holes with center holes of plastic anchors (A), inserting mounting screws (C) to secure mounting strap (B) to the wall.
6. Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (D).
7. Connect Neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (D).
8. Repeat procedure for the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
9. Gently push the fixture base (D) onto the wall outlet, letting rod on mounting strap (B) pass through the hole on the fixture base (D) and tighten by screwing cap nut (E) to the exposed part of rod.
10. Insert light bulb into lamp holder.
11. Attach lamp shade (F) to fixture base, and secure with thumbscrews (G).

R A L P H L A U R E N