

ASSEMBLY INSTRUCTIONS

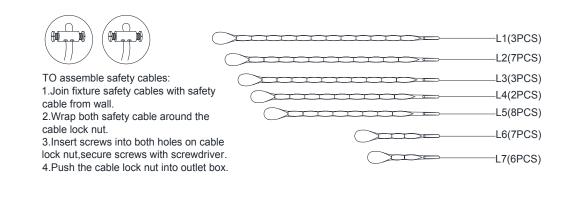

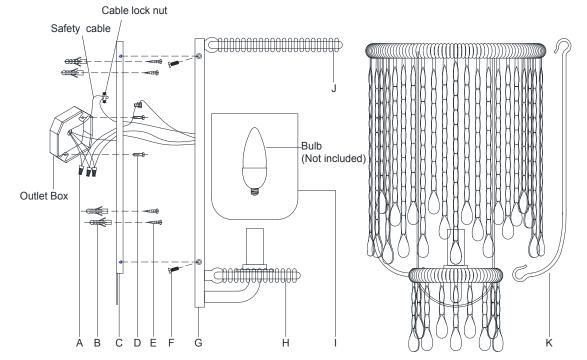

Kayla Medium Sculpted Sconce

Item # RL 2620

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING^{***}SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- -----
- 1. Carefully remove all parts from the box.
- 2. Remove the mounting plate (C) from the backplate (G) by loosening side screws (F).
- Drill 4 holes on the wall and make sure the hole distance will match to the holes on the mounting plate (C) exactly.
- 4. Knock the anchors (B) into the wall holes.
- Affix mounting plate (C) onto the outlet box and secure with mounting screws (D), then secure the screws (E) to the anchors (B).
- Connect the hot wire (BLACK) from the fixture to the hot wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector (A) provided and wrap the connection with electrical tape.
- Connect the neutral wire (WHITE) from the fixture to the wire from the outlet box (usually WHITE).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.


 Connect ground wire from the fixture (bare copper) to ground wire from the outlet box (usually green or copper in color).

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

- 9. Attach backplate (G) onto the mounting plate (C) and secure with side screws (F).
- 10. Put the alabaster shade (I) to the socket cup.
- 11. Insert bulb (not included) into the socket.

RALPH LAUREN

ASSEMBLY INSTRUCTIONS

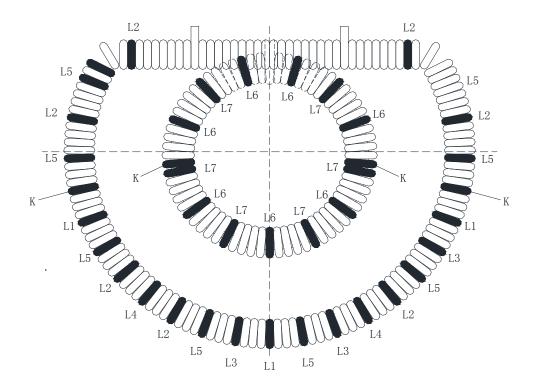

Kayla Medium Sculpted Sconce

Item # RL 2620

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- 12. Attach the large hook (K) one end to the metal ring (J), another end to the metal ring (H).
- Hang the metal drops (L1 & L2 & L3 & L4 & L5) to the metal ring (J). The location of the metal drops should follow the graph.
- 14. Hang the metal drops (L6 & L7) to the metal ring (H). The location of the metal drops should follow the graph.
- 15. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

RALPH LAUREN