


ASSEMBLY INSTRUCTIONS

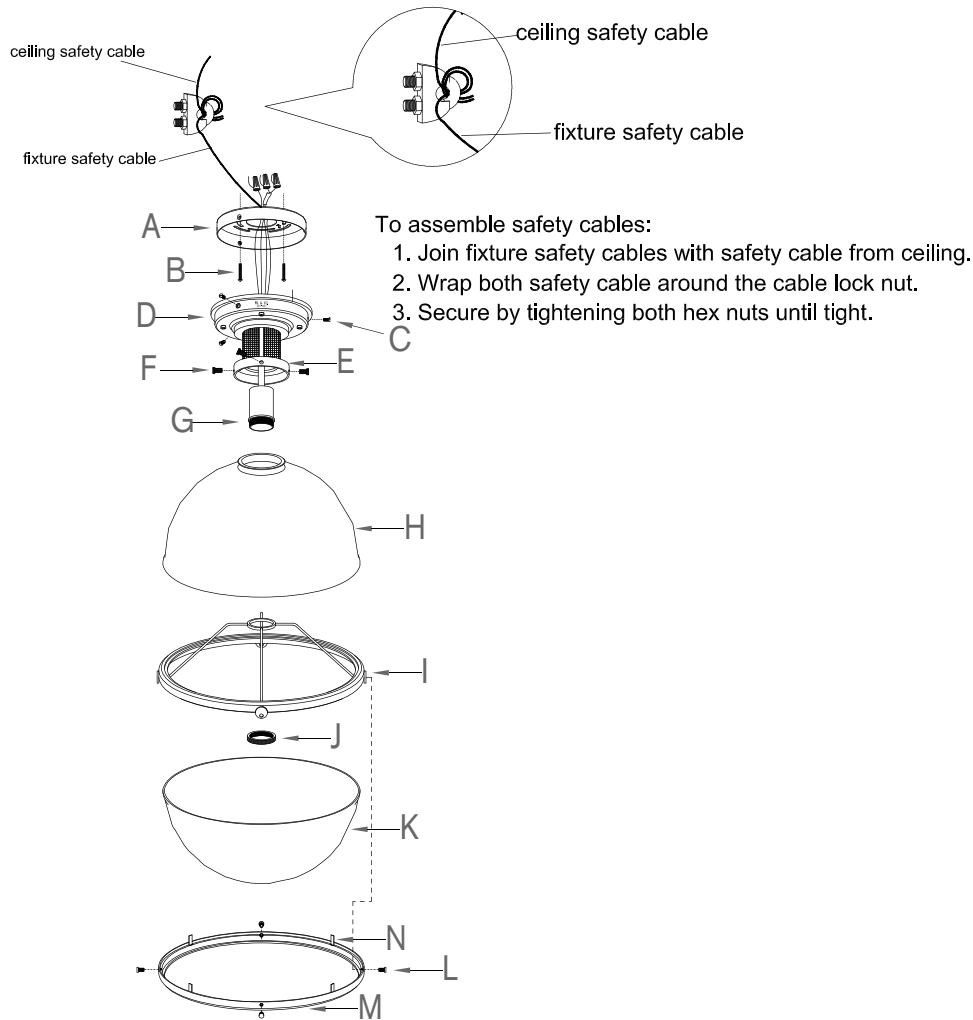

McCarren Large Flush Mount

Item # RL4462

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Remove mounting plate (A) from base of light fixture (D) by removing base screws (C) in counter-clockwise direction.
2. Affix mounting plate (A) to ceiling outlet box with mounting screws (B) provided.
3. Attach fixture steel safety cable to structural member in the ceiling. (Refer to the illustration)
4. Connect ground wire from the light fixture (bare copper) to ground wire (green or copper in color), fasten together with a plastic wire connector. Tightly wrap the wire from ceiling outlet box with electrical tape. so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. 6. Connect the hot wires (smooth wires) from the light fixture to the hot junction box wire from ceiling outlet box (usually black). Fasten together with a plastic wire connector provided and tightly wrap wire connector with electrical tape.
6. Repeat the procedure with neutral wires (ribbed wire) from the light fixture to the wire from ceiling outlet box (usually white).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS
OTHERWISE SAFETY WILL BE COMPROMISED.
7. Attach fixture base (D) to the affixed mounting plate (A) and tighten with base screws (C).
8. Insert glass shade (K) into metal ring (M) and secure by bending back the metal babs (N) downwards.
9. Loosen screws (F), attach glass shade (H) to shade holder (E) and secure with screws (F).
DO NOT OVER TIGHTEN OTHERWISE GLASS WILL BE DAMAGE.



RALPH LAUREN

ASSEMBLY INSTRUCTIONS

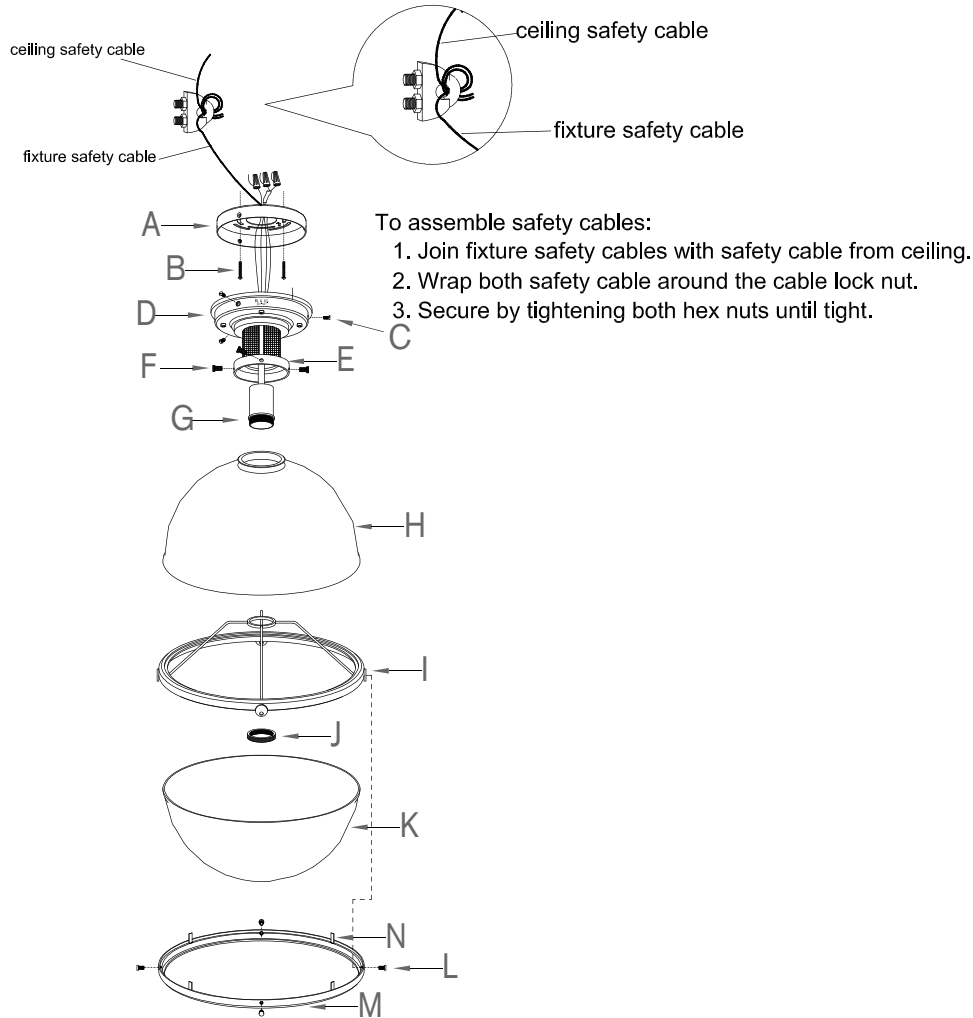

McCarren Large Flush Mount

Item # RL4462

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

10. Remove socket ring (J) from threaded socket (G), attach bracket (I) to the threaded section of socket and secure with socket ring (J).
11. Insert light bulb (not included) into socket.
12. Remove screws (L), attach metal ring (M) with glass shade (K) to bracket (I) and secure by replacing screws (L).

*** Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.



RALPH LAUREN