


RL5032

ASSEMBLY & INSTALLATION GUIDE

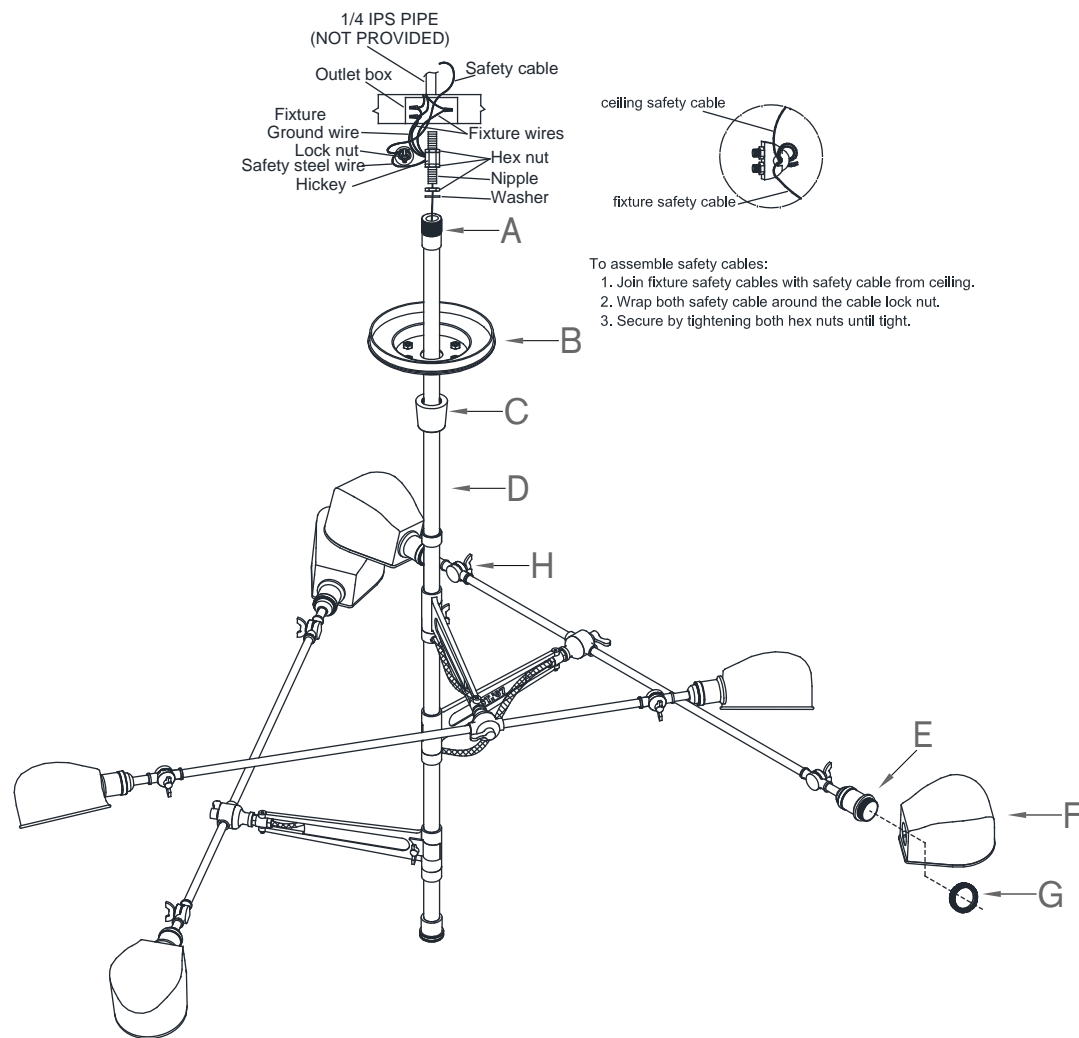

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully remove all parts from the carton
2. Provide a 1/4" IPS pipe with one end securely mounted to beam or a structural. The other end should protrude through the enter of the outlet box as shown.
3. Unscrew canopy collar (C), slide canopy collar (C) and canopy (B) on pole (D).
4. Thread nipple into the mounting loop (A) by turning clockwise direction.
5. Insert top threaded nipple in mounting 1/4 IPS pipe.
6. Lace the fixture wires, ground wires and safety cable through the pole (D) and mounting loop (A), exiting through the side of hickey. Run the safety cable through the top of the outlet box and secure to structural member.
7. Attach fixture steel safety cable to structural member in the ceiling.
8. Attach the bare copper ground from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect neutral wire from fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
10. Connect the hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connccetor and wrap the connection with eletrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
11. Tuck wire connections neatly into ceiling outlet box.
12. Slip canopy (B) to ceiling and secure with canopy collar (C).
13. Remvoe socket rings (G) from sockets (E), attach shades (F) to sockets (E) and secure with scket rings (G).
14. Insert light bulbs into sockets.
15. Restore power and test fixture. Installation is complete.

TO ADJUST:

1. Loosen adjustment keys (H),
2. Adjust lamp shade or arm to desired position.
3. Tighten adjustment keys (H).

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



RALPH LAUREN