


ASSEMBLY INSTRUCTIONS

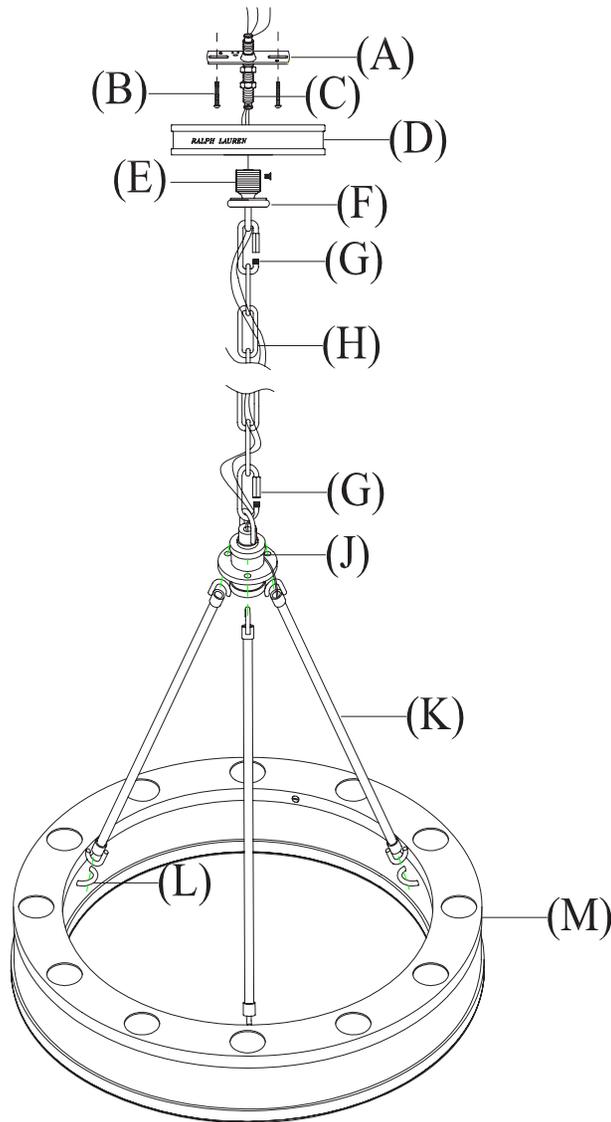

Roark 20 Modular Ring Chandelier

Item # RL5130

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Connect one end of support rod (K) to eyelet (L) on fixture body (M). Connect the other one end of support rod (K) to center hub (J).
2. Repeat step 1 for remaining two support rods (K).
3. Open the quick link (G) on other of chain and connect to mounting loop (E).
4. Unscrewing the canopy ring (F) from chain mounting loop (E) and slide canopy (D) and canopy ring (F) on chain (H).
5. Attach chain mounting loop (E) to thread nipple (C) using the ceiling loop screw.
6. Attach mounting strap (A) to ceiling outlet box using mounting
7. screws (B) provided.
8. Gently pull outlet box wires through center of mounting strap (A) and allow to hang.
9. Thread wire from center hub (J) through chain, and into the hole in the center of canopy (D).
10. With another person supporting the weight of the fixture, connect the electrical wires to the outlet box wires as shown in Fig.1.
11. Wrap all connections in electrical tape for additional protection.
12. Tuck all wires neatly into the electrical box.
13. Slip canopy (D) to ceiling and secure with threaded canopy ring (F).
14. Insert light bulbs (not included) into sockets.
15. Reconnect power and test operation of fixture.
16. Installation is now complete.



RALPH LAUREN