

# ASSEMBLY INSTRUCTIONS

## Roark 30" Modular Ring Chandelier


Item # RL5131

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

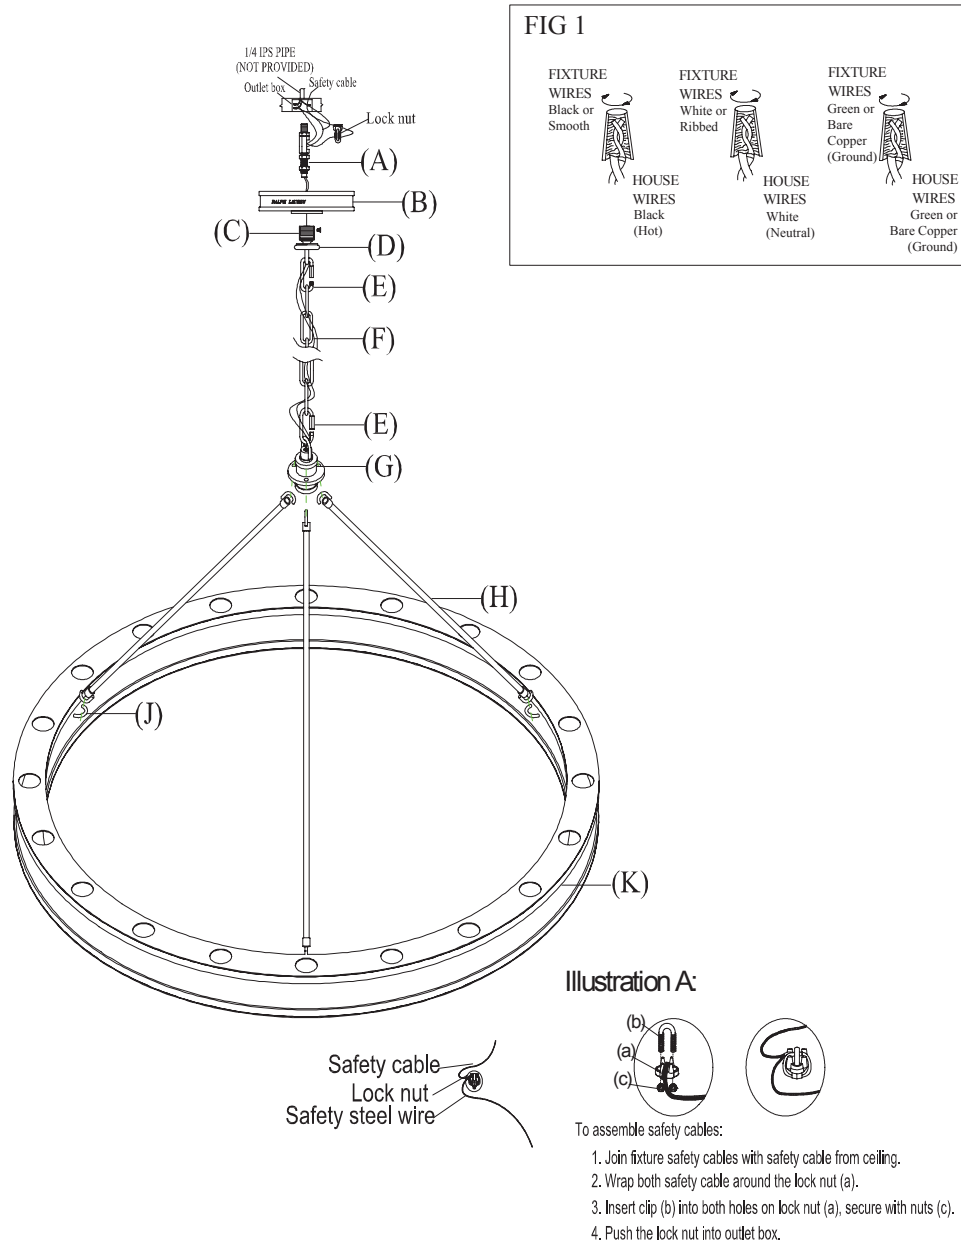

- Connect one end of support rod (H) to eyelet (J) on fixture body (K). Connect the other one end of support rod (H) to center hub (G).
- Repeat step 3 for remaining two support rods (H).
- Open the quick link (E) on one end of the chain (F) and attach to top loop on center hub (G).
- Determine correct length of chain for desired hanging height. Using pliers, open chain link and remove unnecessary chain.
- Open the quick link (E) on other of chain (F) and connect to mounting loop (C).
- Unscrewing the canopy ring (D) from chain mounting loop (C) and slide canopy (B) and canopy ring (D) on chain.
- Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A)
- Attach chain mounting loop (C) to thread nipple (A) using the ceiling loop screw. Gently pull outlet box wires to hang.
- Thread wire from center hub (G) through chain, and into the hole in the center of canopy (B).
- With another person supporting the weight of the fixture, connect the electrical wires to the outlet box wires as shown in Fig.1.
- Wrap all connections in electrical tape for additional protection. Tuck all wires neatly into the electrical box.
- Insert top thread nipple (A) in mounting 1/4 IPS PIPE.
- Slip canopy (B) to ceiling and secure with threaded canopy ring (D).
- Insert bulbs (not included) into sockets.
- Reconnect power and test operation of fixture. Installation is now complete.



# RALPH LAUREN