

RL5134


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

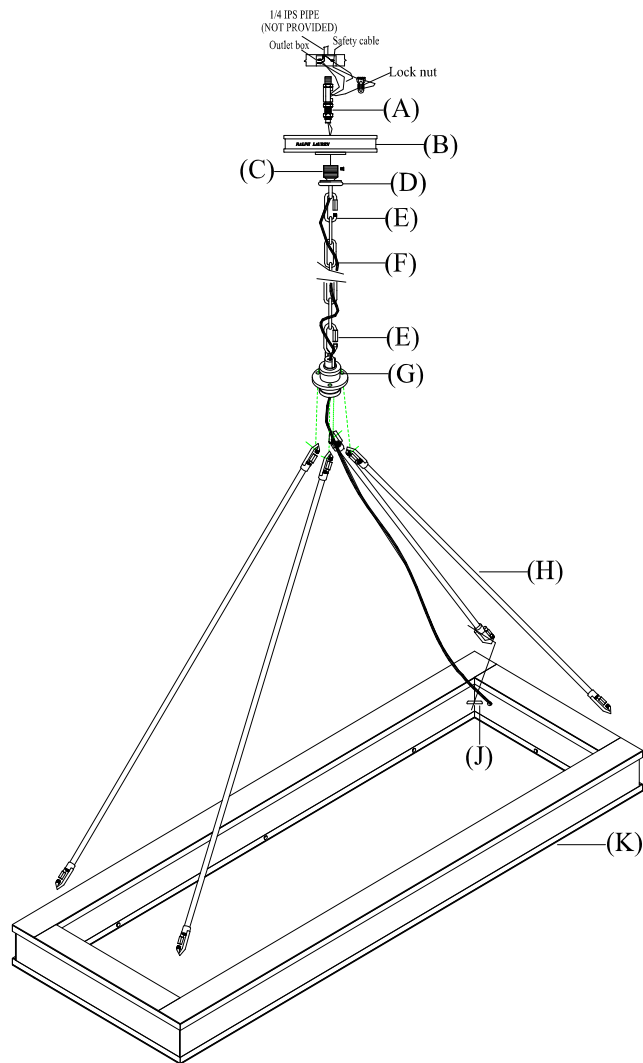

1. Connect one end of support rod (H) to eyelet (J) on fixture body (K). Connect the other one end of support rod (H) to center hub (G).
2. Repeat step for remaining three support rods (H).
3. Open the quick link (E) on one end of the chain (F) and attach to top loop on center hub (G).
4. Determine correct length of chain for desired hanging height.
5. Using pliers, open chain link and remove unnecessary chain.
6. Open the quick link (E) on other of chain (F) and connect to mounting loop (C).
7. Unscrewing the canopy ring (D) from chain mounting loop (C) and slide canopy (B) and canopy ring (D) on chain.
8. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A)
9. Attach chain mounting loop (C) to thread nipple (A) using the ceiling loop screw.
10. Gently pull outlet box wires to hang.
11. Thread wire from center hub (G) through chain, and into the hole in the center of canopy (B).
12. With another person supporting the weight of the fixture, connect the electrical wires to the outlet box wires as
13. Wrap all connections in electrical tape for additional protection.
14. Tuck all wires neatly into the electrical box.
15. Insert top thread nipple (A) in mounting 1/4 IPS PIPE.
16. Slip canopy (B) to ceiling and secure with threaded canopy ring (D).
17. Insert light bulbs into the sockets.
18. Reconnect power and test operation of fixture.
19. Installation is now complete.

R A L P H L A U R E N