

ASSEMBLY INSTRUCTIONS

Kayla Small Sculpted Chandelier

Item # RL 5620



WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

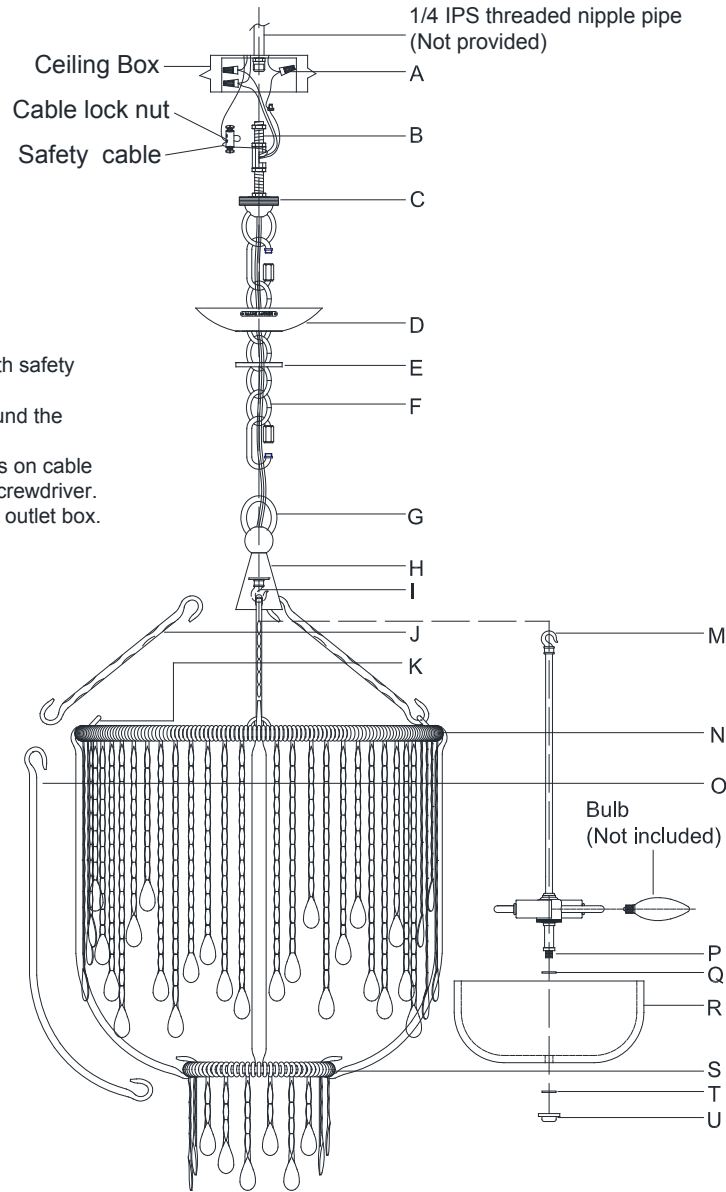

TO assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the cable lock nut.
3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
4. Push the cable lock nut into outlet box.


- L1(8PCS)
- L2(9PCS)
- L3(14PCS)
- L4(6PCS)
- L5(11PCS)
- L6(5PCS)
- L7(3PCS)
- L8(4PCS)
- L9(7PCS)
- L10(6PCS)
- L11(7PCS)

1. Carefully remove all parts from the box.
2. Attach the rubber washer (Q), alabaster shade (R) to the threaded nipple (P) and secure with rubber washer (T) and finial (U).
3. Attach the hook (M) to the hook (I) in the cap (H).
4. A 1/4" threaded nipple must be installed in your outlet box. Then install the threaded nipple (B) into the outlet box.
5. Attach the canopy (D) to the ceiling loop (C) and secure with lock collar (E).
6. Unscrew the threaded collar on the chain end link and attach it to the ceiling loop (C). Close the threaded collar to secure.
7. With the fixture dimension as a guide, shorten the chain (F) as needed using a pair of chain pliers.
8. Unscrew the threaded collar on the other chain end link, raise the fixture then attach chain end link to the top ring (G). Close the threaded collar to secure the fixture body.
9. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (F).
10. When you reach the canopy and ceiling loop, measure the wires then cut. Be certain to leave enough to connect inside of the outlet box.
11. Strip the insulation back on the two power supply wires about 5/8".
12. Twist the power supply and ground wire together and push through the center hole of the ceiling loop (C).
13. Loosen the lock collar (E) and slip down the canopy (D) carefully.



RALPH LAUREN

ASSEMBLY INSTRUCTIONS

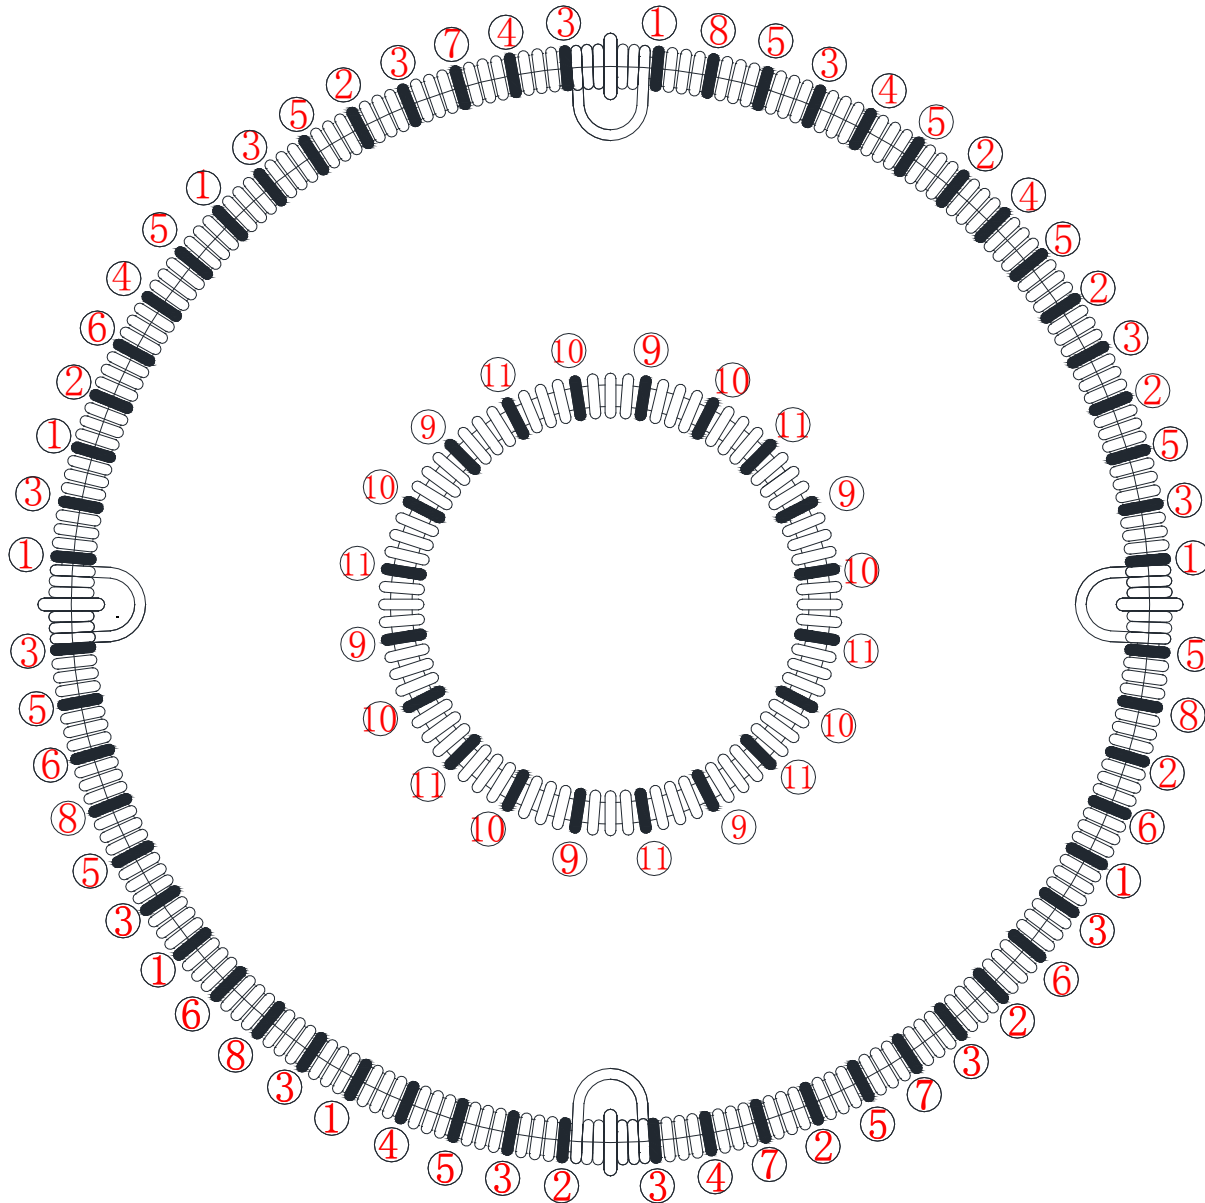

Kayla Small Sculpted Chandelier

Item # RL 5620

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

14. Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A) .If your house does not have ground wire,then attach this wire to the green grounding screw inside of the outlet box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

15. Connect the fixture Neutral (ribbed,no markings) wire with the neutral wire from the outlet box using wire nut (A).

16. Connect the fixture Hot (smooth edge,markings) wire with the hot wire from the outlet box using wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

17. Tuck these wire connections neatly into the outlet box to secure.

18. Put canopy (D) to the ceiling loop (C) and secure with lock collar (E).

19. Attach the rods (J) one end to the cap (H), the other end to the hook (K).

20. Attach the rods (O) one end to the ring (N), the other end to the ring (S).

21. Hang the metal drops (L1 & L2 & L3 & L4 & L5 & L6 & L7 & L8) to the ring (N). The location of the metal drops should follow the drawing.

22. Hang the metal drops (L9 & L10 & L11) to the ring (S). The location of the metal drops should follow the drawing.

23. Insert bulbs (not included) into the sockets.

24. Installation is complete,turn on power at fuse or circuit breaker.

***Clean with a dry ,soft cloth only.Use no harsh abrasives or chemical agents.



RALPH LAUREN