


ASSEMBLY INSTRUCTIONS

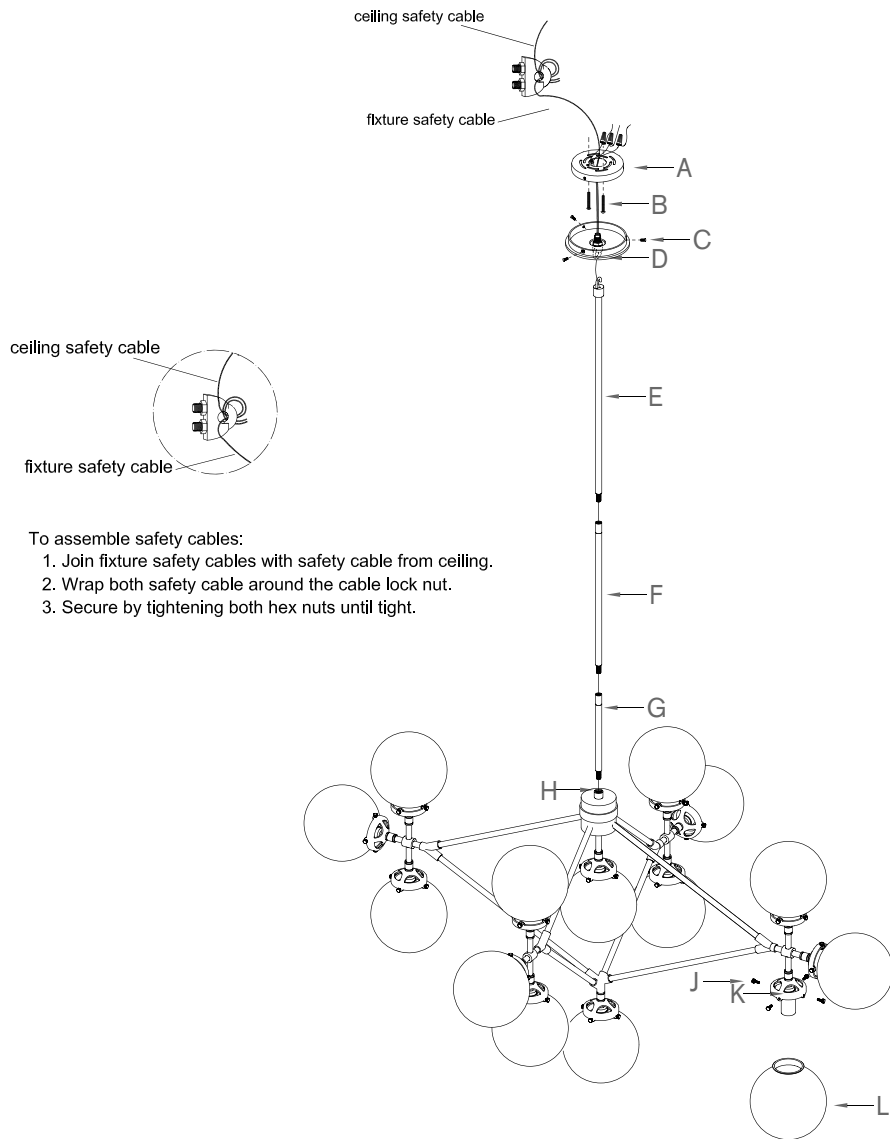

Bistro 4 Arm Chandelier

Item # S5024

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Thread bottom nipple of pole (G) into the center hole of light fixture (H).
2. Thread bottom nipple of pole (F) into the top opening of pole (G).
3. Thread bottom nipple of pole (E) into the top opening of pole (F).
4. Hook top loop (E) to mounting loop on canopy (D).
5. Remove mounting plate (A) from canopy (D) by unscrewing canopy screws (C).
6. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B).
7. Gently pull the wires from the ceiling and allow the wires to hang. Thread the wires through the center hole in mounting plate (A).
8. Attach fixture steel safety cable to structural member in the ceiling. (Refer to the illustration)
9. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
10. Connect the neutral wire from the fixture (ridge molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
11. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.



VISUAL COMFORT & Co. Est. 1987

ASSEMBLY INSTRUCTIONS

Bistro 4 Arm Chandelier


Item # S5024

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

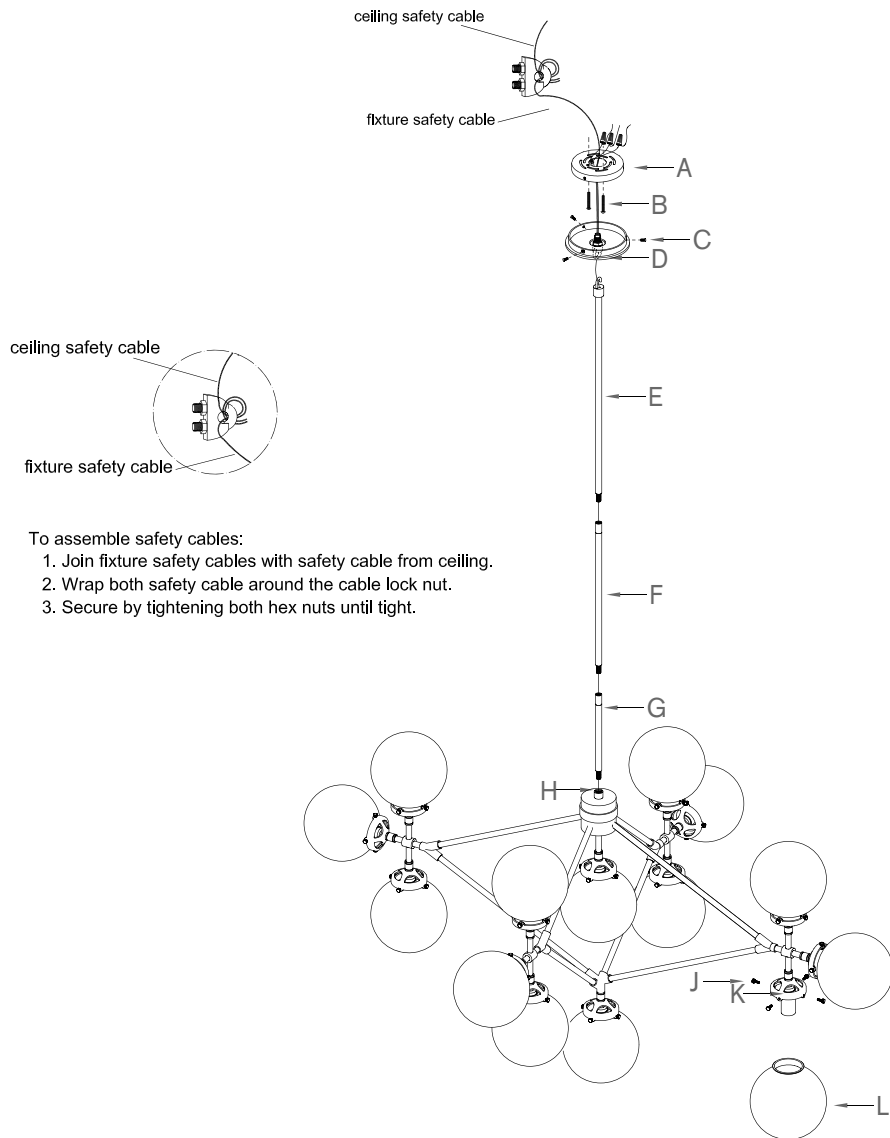

1. Attach canopy (D) to the affixed mounting plate (A), align the holes on the side and secure with canopy screws (C).
2. Insert light bulbs (not included) into the sockets.
3. Loosen screws (J), carefully insert glass shades (L) into shade holders (K) and secure by tighten screws (J).

DO NOT OVERTIGHTEN OTHERWISE GLASS WILL BE DAMAGE.

***Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.

