


ASSEMBLY INSTRUCTIONS

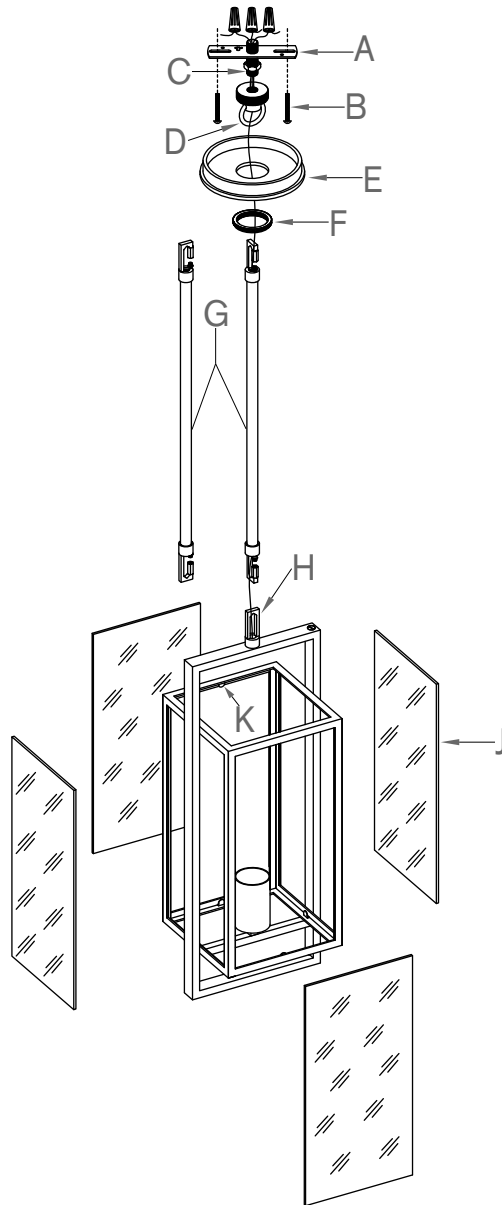

Halle Petite Lantern Item # S 5190

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully remove all parts from the carton.
2. According to the hanging length, attach one or two poles (G) to top loop (H) by opening/closing end link of pole.
3. Feed wire through pole (G), canopy (E) and collar loop (D).
4. Unscrew canopy ring (F), slide canopy ring (F) and canopy (D) on pole (G).
5. Attach mounting strap (A) to ceiling outlet box and secure with mounting screws (B).
6. Insert top thread nipple (C) with collar loop into mounting strap (A).
7. Attach pole with light fixture to collar loop (D).
8. Attach the bare copper ground from the fixture to the ground junction box wire (usually green or copper), fasten together with a plastic wire connector. Tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
9. Connect neutral wire from fixture (ridges molded wire) to the neutral wire from the junction box (usually white) . Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape. Be sure no wire strands are exposed.
10. Connect the hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
11. Tuck the wire connections neatly into the ceiling outlet box.
12. Slip canopy (E) to ceiling and secure with canopy ring (F).
13. To insert glass panels (J) provided to each frame, make secure metal tabs (K) are flipped against the opening of frame. Place glass panels (J) to each frame and secure glass panels (J) by bending back metal tabs (K) downwards.
14. Insert light bulb (not included) into socket.
15. Restore power and test fixture. Installation is complete. .

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.