
ASSEMBLY INSTRUCTIONS



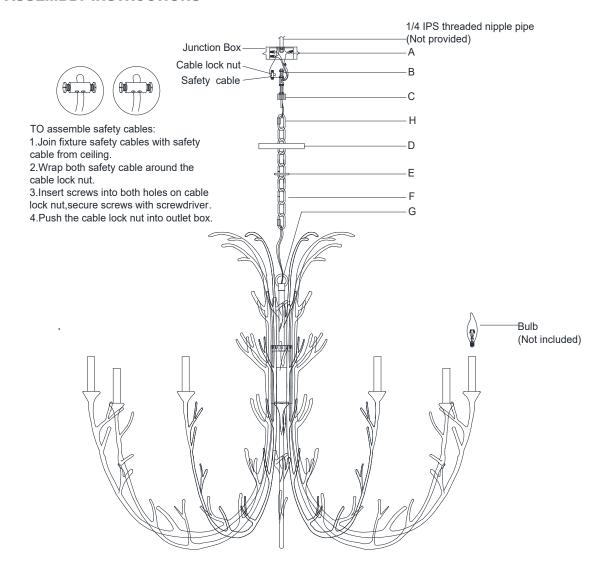

Item # JN 5080

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.


- 1. Carefully remove all parts from the box.
- A 1/4 IPS pipe must be installed through the junction box and secured to a structural member of the building. This item must hang independently of the junction box.
 Then install the threaded nipple (B) into the 1/4 IPS PIPE.
- 4. With the fixture desired height, shorten the chain (F) as needed using the chain pliers (not included).
- 5. Install the canopy (D) to the junction box and secure with the collar ring (E).
- 6. Open one chain quick link (H), then attach the chain quick link (H) to the collar loop (C). Secure the chain quick link (H).
- 7. Open the chain quick link (H) from the opposite side then attach to the fixture loop (G). Secure the chain quick link (H).
- 8. Weave the fixture wires and safety cable through the chain (F).
- 9. Loosen the collar ring (E) and let the canopy (D) slip down the chain (F) carefully.
- 10. Weave the fixture wires and safety cable through the ceiling loop (C). Measure the wires then cut, be certain to leave enough length to connect the wire in the junction box.
- 11. Strip the insulation on the fixture wires about 5/8".
- 12. Run safety cable through junction box and install to structural member of the building. Secure using cable lock nut as shown in figure.







ASSEMBLY INSTRUCTIONS

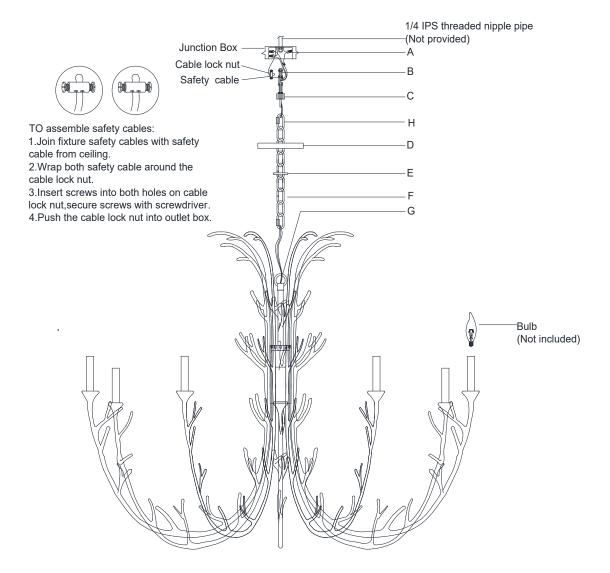



Item # JN 5080

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

13. Connect the fixture ground wire to the ground wire in the junction box using the wire nut (A).

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

- 14. Connect the fixture ribbed wire (no markings) to the neutral wire in the junction box using the wire nut (A).
- 15. Connect the fixture smooth wire (with markings) to the hot wire in the junction box using the wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.

- 16. Tuck the wire connections neatly into the outlet box carefully.
- 17. Install the canopy (D) to the junction box and secure with the collar ring (E).
- 18. Insert bulbs (not included) into the sockets.
- 19. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.







