


ASSEMBLY INSTRUCTIONS

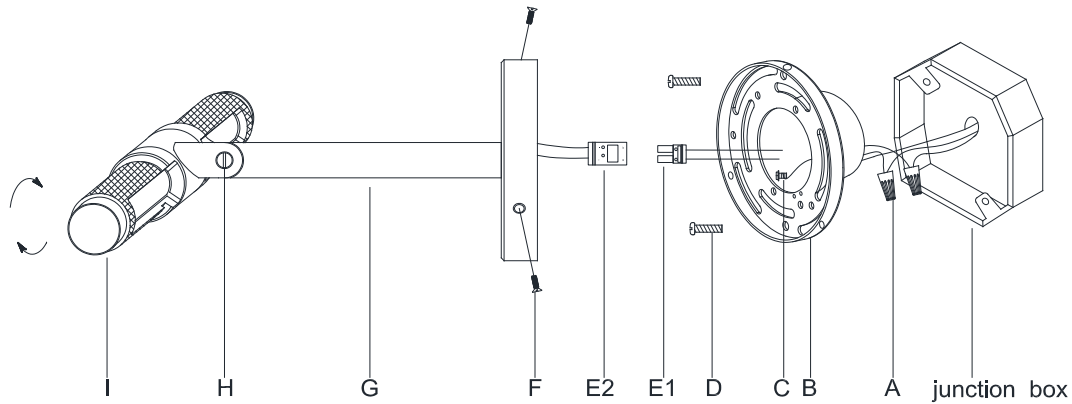

Barrett 12"/18"/24" Picture Light

Item # RL 2722/RL 2723/RL 2724

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. Remove the mounting plate (B) from the fixture body (G) by loosening side screws (F).
3. Disconnect conductive plugs (E1 & E2) .
4. Wrap ground wire from the junction box to the green grounding screw on the mounting plate (B).

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

5. Connect the neutral wire (White) from the fixture to the neutral wire (usually white) from the junction box using wire nut (A).
6. Connect the hot wire (Black) from the fixture to the hot wire (usually black) from the junction box using wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

7. Affix mounting plate (B) onto the junction box and secure with mounting screws (D).
8. Connect the conductive plug (E1 & E2) together.
9. Attach the fixture body (G) onto the mounting plate (B) and secure with side screws (F).
10. You can adjust the location of the arm (I) by loosening and tightening the screw (H).
You can also adjust the location of the light source by rotating the arm (I).
11. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.