


RL5082

ASSEMBLY & INSTALLATION GUIDE

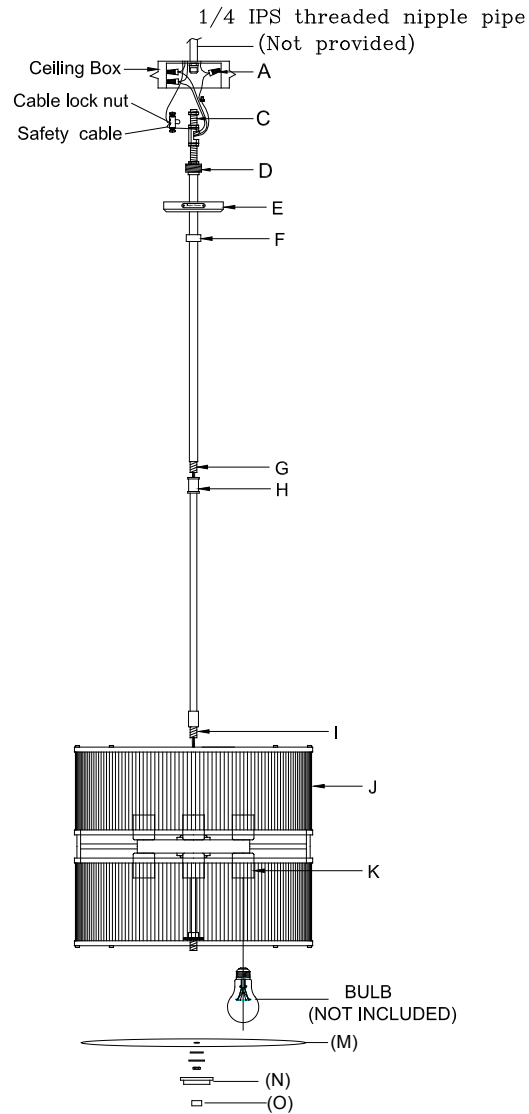

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Remove all the parts of this item from the carton carefully.
2. Thread upper and lower stems together.
3. Secure fixture body (J) to stem completed stem set.
4. Install the threaded nipple (C) with hickey and nut into the ceiling box. You must provide a 1/4 IPS threaded nipple which will go through the top of ceiling box and through a structural member of building.
5. Attach ceiling loop (D) to the threaded nipple(C).
6. Put canopy (E) to ceiling loop, and secure with lock collar (F).
7. Pull the cord & ground wire carefully up into the outlet box.
8. Separate the two cords carefully and identify the Hot &Neutral wire.
9. Attach the ground wire from the fixture (Green or bare copper) to ground wire from outlet box.
10. Connect the Hot wire from the fixture (Black) to the hot wire from outlet box. Fasten them together with a plastic wire connector(A) Repeat this procedure for the White neutral wire from the light fixture to the wire from outlet box.
11. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OTHERWISE SAFETY WILL BE COMPROMISED. Twist the wire connection neatly into ceiling outlet box.
12. Insert light bulbs (not included) into sockets.
13. Put cover (M) onto the center pipe and secure with finial (O) and washer (N).
14. Assembly is complete.

R A L P H L A U R E N