


ASSEMBLY INSTRUCTIONS

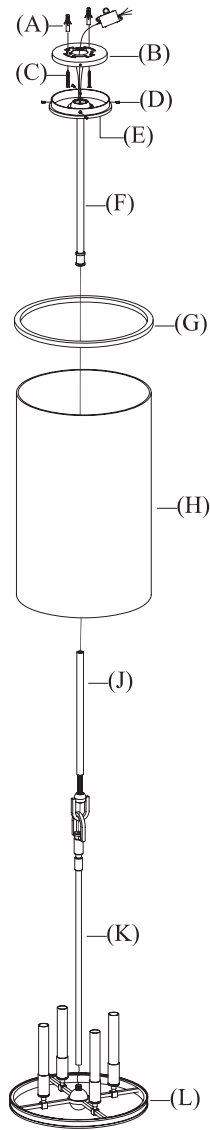

Modern Large Lantern

Item # RL5177

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Thread pole (K) onto the center nipple of part (L).
2. Insert light bulbs (NOT INCLUDED) into lamp holders.
3. Insert glass cylinder (H) into the ring of part (L).
4. Place ring (G) onto the top of glass cylinder (H).
5. Thread pole (F) onto the inner rod of pole (J).
6. Feed wires through poles (K), (J) and (F).
7. Remove mounting plate (B) from fixture base (E) by unscrewing base screws (D). Place mounting plate (B) on the ceiling, use it as a template, mark center points for both mounting slots for mounting plate (B) on the ceiling. Remove mounting plate (B).
8. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
9. Gently pull the wires from the ceiling outlet and allow the wires to hang. Thread the wires through the center hole in mounting plate (B).
10. Affix mounting plate (B) to the ceiling by aligning mounting holes with center holes of plastic anchors (A), inserting mounting screws (C) to secure mounting plate (B) to the ceiling.
11. Connect ground (usually green) outlet wire to ground (green) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (E).
12. Connect Neutral (usually blue) outlet wire to neutral (blue) side of terminal block by loosening set screw, inserting outlet wire and tightening set screw. The terminal block is attached at backside of fixture base (E).



RALPH LAUREN

ASSEMBLY INSTRUCTIONS

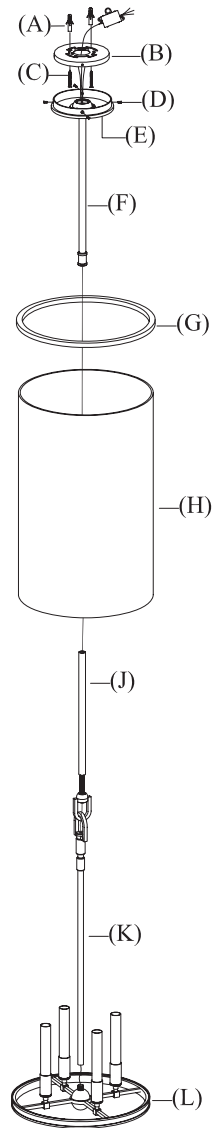

Modern Large Lantern

Item # RL5177

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

13. Repeat procedure for the hot (brown) outlet wire to hot side of terminal block. Always make sure that no wire strands are left outside the terminal block. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
14. Attach fixture base (E) to the affixed mounting plate (B), align the holes on the side, insert base screws (D) into the holes to secure the base (E) to the mounting plate (B).
15. Restore power and test fixture.



RALPH LAUREN