



PENDANTS

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with a low-voltage electronic dimmer.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

NOTE: This canopy may be installed to sloped ceilings with **MAX 90°** tilt in either direction.




Install the Mounting Plate

1A

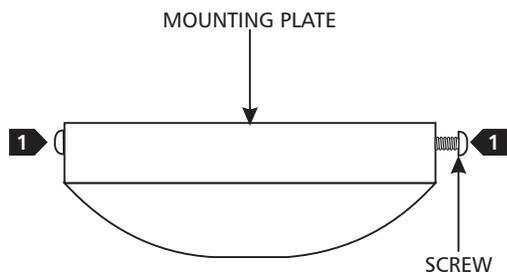


1 Separate the mounting plate from the canopy by removing the two screws.

1B

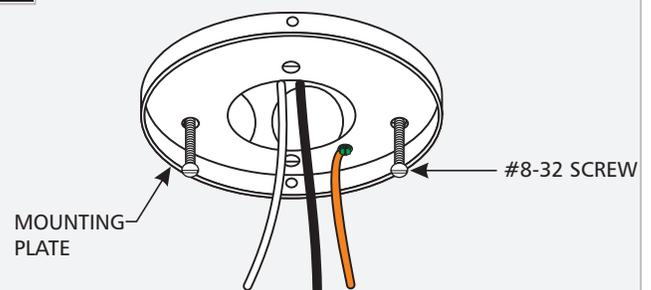


2 Secure the mounting plate to the electrical box with the two #8-32 screws provided.

Assemble the Fixture

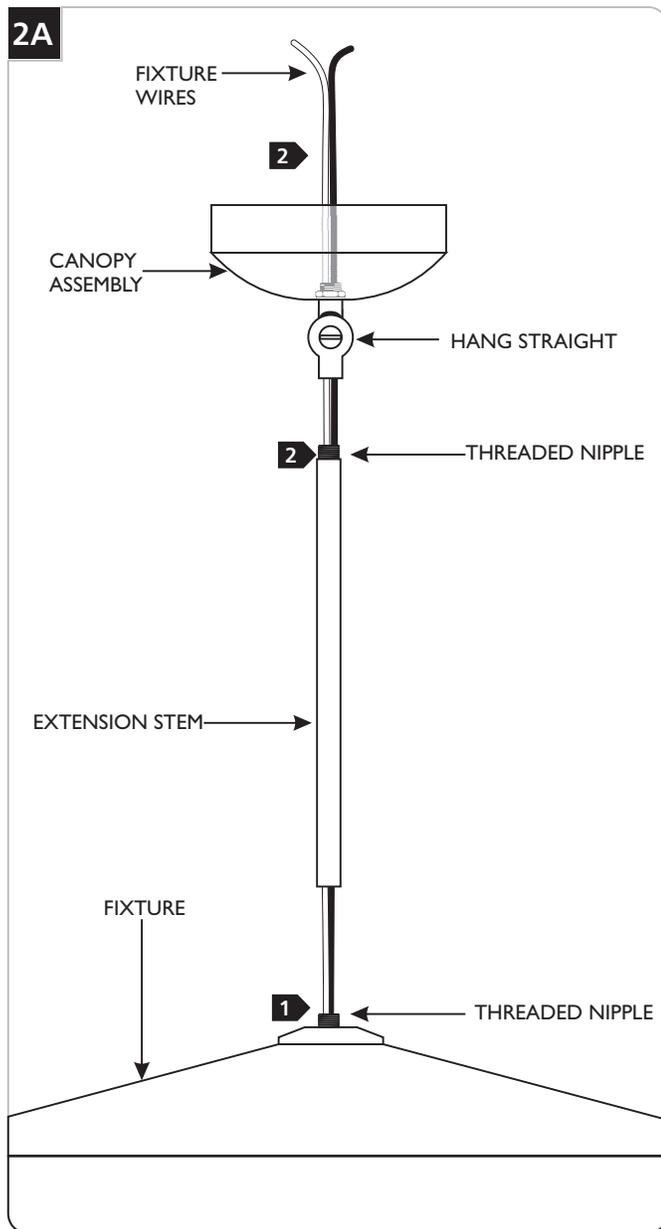


- 1 Determine the wanted length of the fixture, if necessary, feed the fixture wires through the stems and tighten stems completely to the threaded nipple on the fixture.
- 2 Feed the fixture wires through the hang straight and canopy assembly and tighten completely to the threaded nipple.

Install the Fixture

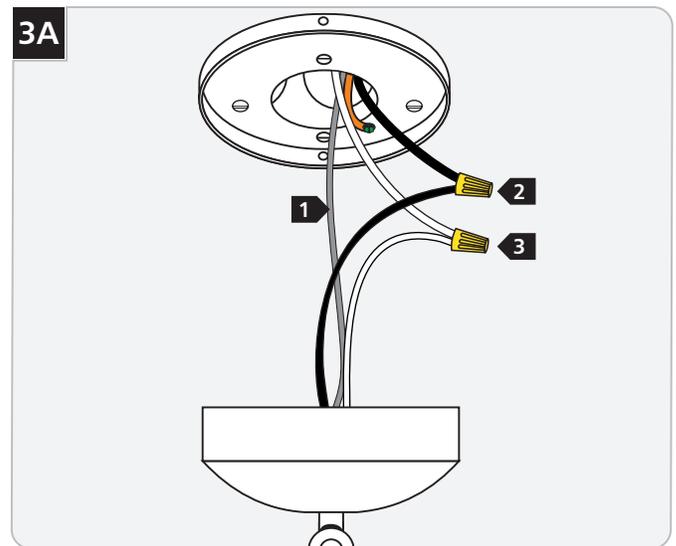

- 1 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 2 Connect the black fixture wire to the hot power line wire with a wire nut.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.

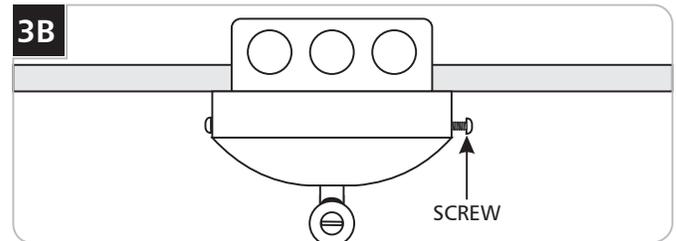

- 4 Properly place all wires and wire nut connections inside the canopy.
- 5 Align the canopy holes with the mounting plate holes and secure the canopy in place by tightening the two screws.

SAVE THESE INSTRUCTIONS!

 **TECH LIGHTING®**

7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2019 Tech Lighting, L.L.C. All rights reserved.

Visual Comfort Group