Rhonan Flush Mount (LED)

920FMRHON

700FMRHNS_-LED 1.0



GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is suitable for damp locations.

This product can be dimmed with a low-voltage electronic dimmer.

This fixture may be ceiling or wall mounted.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


Install the Fixture

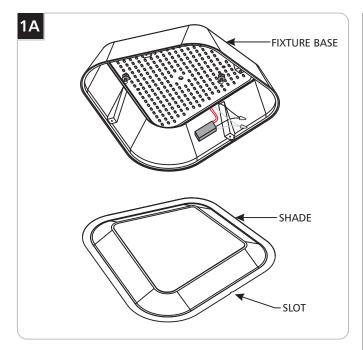

Insert a flat head screw driver into the slot on the shade and separate the shade from the fixture base.

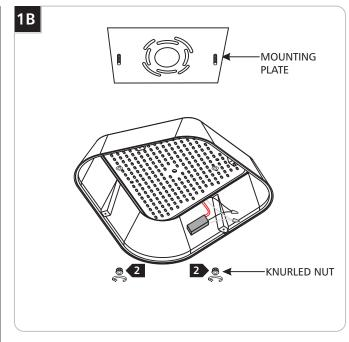


Remove the mounting plate from the fixture base by unscrewing the two knurled nuts.

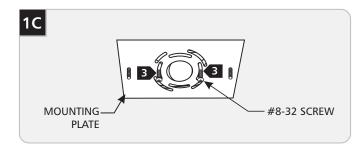


 Secure the mounting plate to the electrical box with 2 #8-32 screws.

NOTE: Install the mounting plate so that the studs are parallel or perpendicular to the walls, this will ensure that the fixture is oriented to the room.

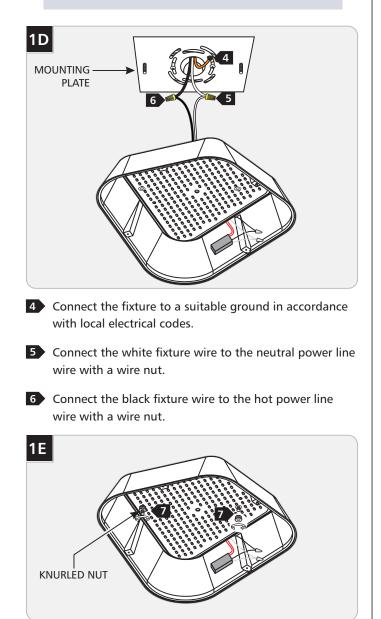

Mount the fixture base to the ceiling by reinstalling it onto the mounting plate and secure it tightly with the knurled nuts.

Install the Shade

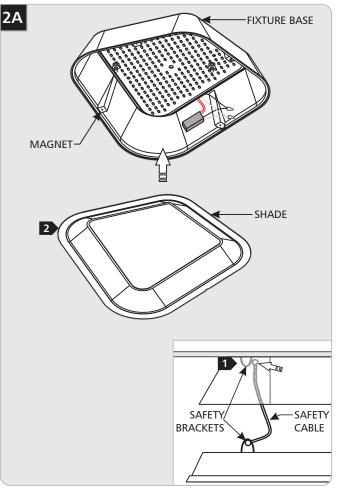

- 1 Hook the safety cable through the safety brackets located in the fixture base and back of the shade.
- Insert the shade into the fixture base until it is secured in place against the magnets. Note: Support the shade from the outer sides, do not push against the center of the shade.

SAVE THESE INSTRUCTIONS!



www.techlighting.com

© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification. A Generation Brands Company