GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards


Use minimum 90°c supply conductors.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

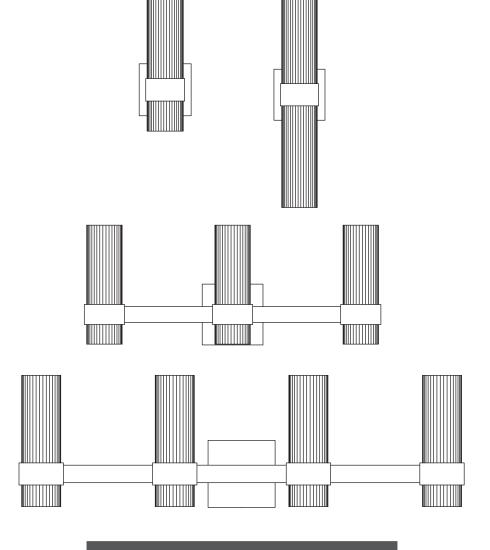

SAVETHESE INSTRUCTIONS!

Install the Fixture

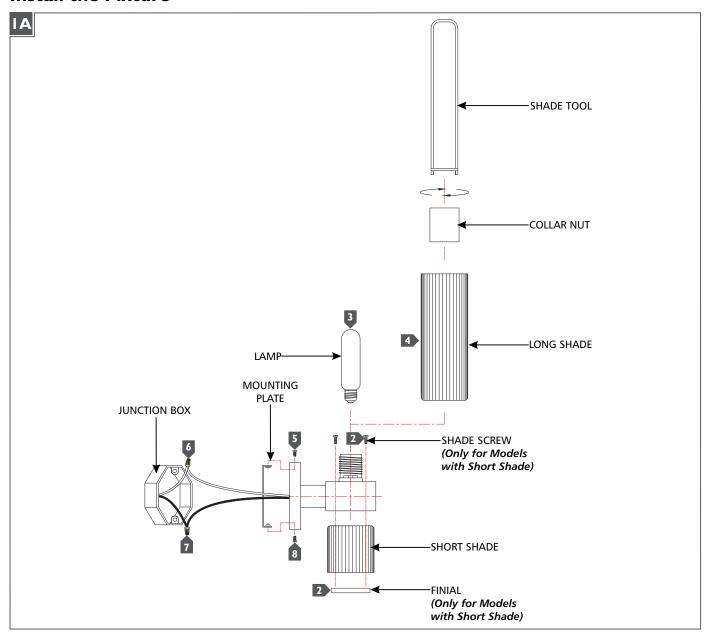

- Secure the mounting plate to the junction box.
- **For Models with Short Shade**: Use shade screws and finial to secure short shade. Repeat for remaining short shades.
- 3 Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.
- 4 Place the long shades onto the socket and secure in place by screwing the collar nut onto the socket using the provided shade tool. Repeat for remaining shades.
- Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white fixture wire to the neutral power line wire with a wire nut.
- 7 Connect the black fixture wire to the hot power line wire with a wire nut.
- Neatly tuck the wiring into the junction box, place the fixture base onto the mounting plate, and secure it in place using fixture screws.