



ASSEMBLY INSTRUCTIONS



TO assemble safety cables:

1. Join fixture safety cables with Safety cable from ceiling.
2. Wrap both safety cable around the cable lock nut.
3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.
4. Push the cable lock nut into outlet box.

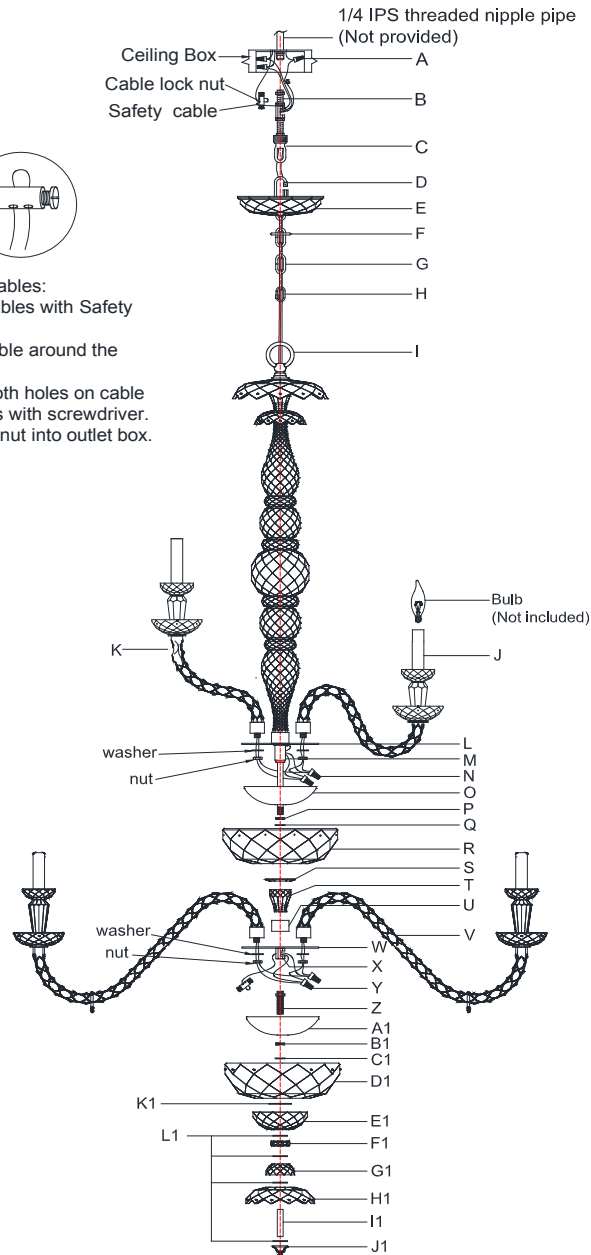

Daniela 24-Light Chandelier

Item # RL 5010

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1. Carefully remove all parts from the box.
2. A 1/4" threaded nipple must be installed in your outlet box. Then install the threaded nipple (B) into the outlet box.
3. With the fixture dimension as a guide, shorten the chain (G) as needed using a pair of chain pliers.
4. Unscrew the threaded collar on the chain end link (D) and attach it to the ceiling loop (C). Close the threaded collar to secure.
5. Attach the canopy (E) to the ceiling loop (C) and secure with lock collar (F).
6. Unscrew the threaded collar on the other chain end link (H), raise fixture body and attach chain end link to the top ring (I). Close the threaded collar to secure the fixture body.
7. Gently set the wire arm (J & K) to the center plate (L) and secure using the spring washer & lock nut. Check that the arms are spaced evenly before final tightening.
8. Connect the hot wire (smooth edge, markings) from the arms to the jumper hot wire (smooth edge, markings) and main hot wire (smooth edge, markings) from the center plate (L) using wire nut (N).
9. Connect the neutral wire (ribbed, no markings) from the arms to the jumper neutral wire (ribbed, no markings) and main neutral wire (ribbed, no markings) from the center plate (L) using wire nut (N).
10. Wrap all connections individually with electrical tape. Double check that all of your connections are correct.
11. Attach the metal bowl (O) to the center plate (L) and secure with threaded washer (P).
12. Attach plastic washer (Q) & crystal bowl (R) & crystal (S) & crystal (T) go through the threaded nipple (M) and secure with connector (U).



RALPH LAUREN

ASSEMBLY INSTRUCTIONS

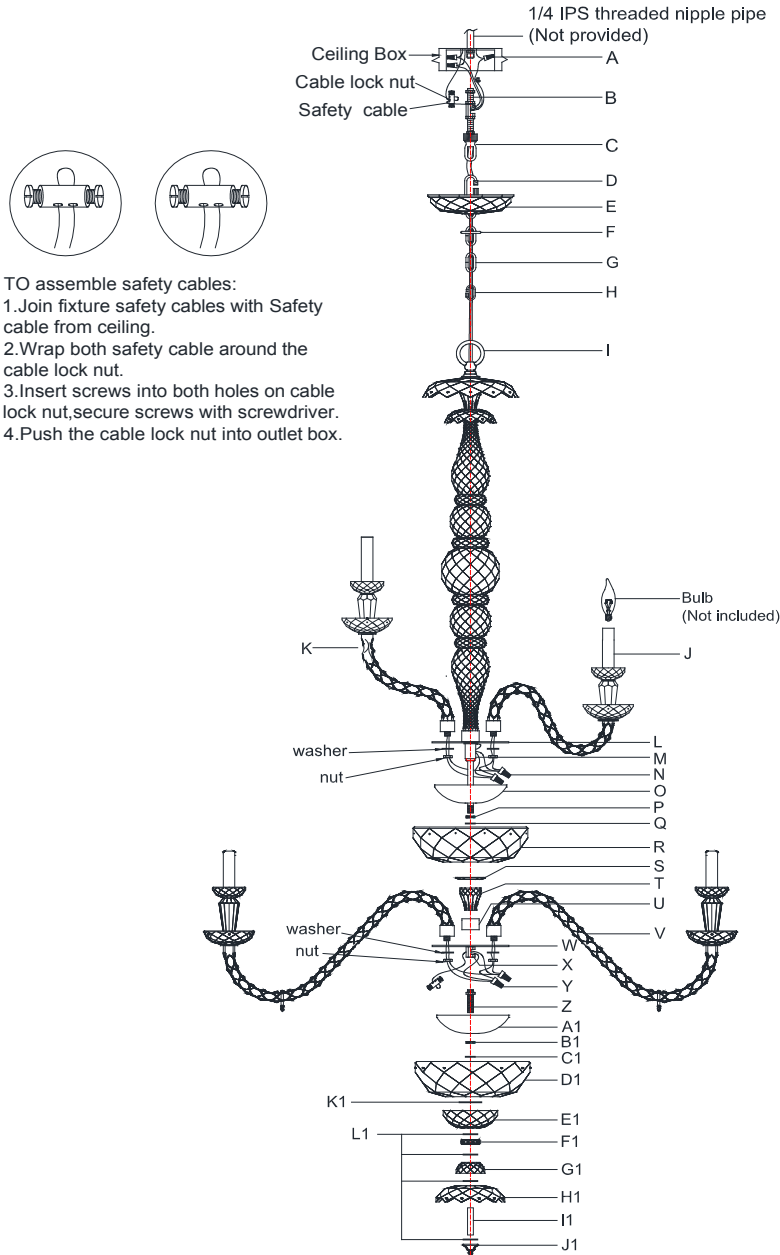

Daniela 24-Light Chandelier

Item # RL 5010

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.


NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

13. Attach the plate (W) to the threaded nipple (M) and secure with hickey (X).
14. Gently set the wire arm (V) to the center plate (W) and secure using the spring washer & lock nut. Check that the arms are spaced evenly before final tightening.
15. Connect the hot wire (smooth edge, markings) from the arms to the jumper hot wire (smooth edge, markings) from the center plate (W) using wire nut (Y).
16. Connect the neutral wire (ribbed, no markings) from the arms to the jumper neutral wire (ribbed, no markings) from the center plate (W) using wire nut (Y).
17. Wrap all connections individually with electrical tape. Double check that all of your connections are correct.
18. Thread the nipple (Z) to the hickey (X), then attach the metal bowl (A1) to the plate (W) and secure with threaded washer (B1).
19. Let plastic washer (C1) & crystal bowl (D1) & plastic washer (K1) & crystal (E1) & plastic washer (L1) & crystal (F1, G1, H1) & tube (I1) go through the nipple (Z), then secure with finial (J1).
20. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (G).
21. When you reach the canopy and ceiling loop, measure the wires then cut. Be certain to leave enough to connect inside of the outlet box.
22. Strip the insulation back on the two power supply wires about 5/8".
23. Twist the power supply and ground wire together and push through the center hole of the ceiling loop (C).



RALPH LAUREN

ASSEMBLY INSTRUCTIONS

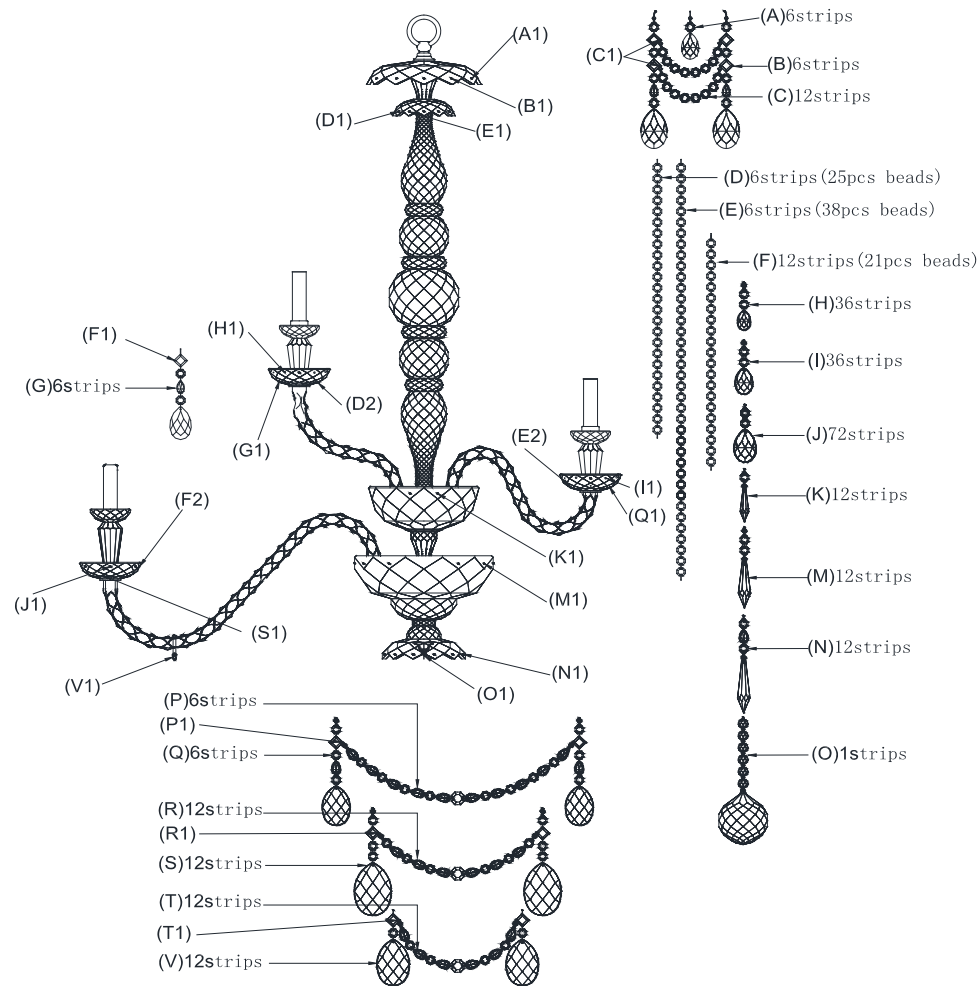

Daniela 24-Light Chandelier

Item # RL 5010

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

24. Loosen the lock collar (F) and let the canopy (E) slip down the chain carefully.

25. Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

26. Connect the fixture Neutral (ribbed, no markings) wire with the neutral wire from the outlet box using wire nut (A).

27. Connect the fixture Hot (smooth edge, markings) wire with the hot wire from the outlet box using wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

28. Tuck these wire connections neatly into the outlet box to secure.

29. Put canopy (E) to the ceiling loop (C) and secure with lock collar (F).

30. Insert bulbs (not included) into the sockets.

31. Attach the crystal drops (A) on hook (A1).

32. Attach the crystal drops (B) on hook (B1).

33. Attach the crystal drops (C) on hook (C1).

34. Attach the crystal drops (D) on hook (D1) & (D2).

35. Attach the crystal drops (E) on hook (E1) & (E2).

36. Attach the crystal drops (G) on hook (G1).

37. Attach the crystal drops (F) on hook (F1) & (F2).


38. Attach the crystal drops (H) on hook (H1).

39. Attach the crystal drops (I) on hook (I1).



RALPH LAUREN

ASSEMBLY INSTRUCTIONS

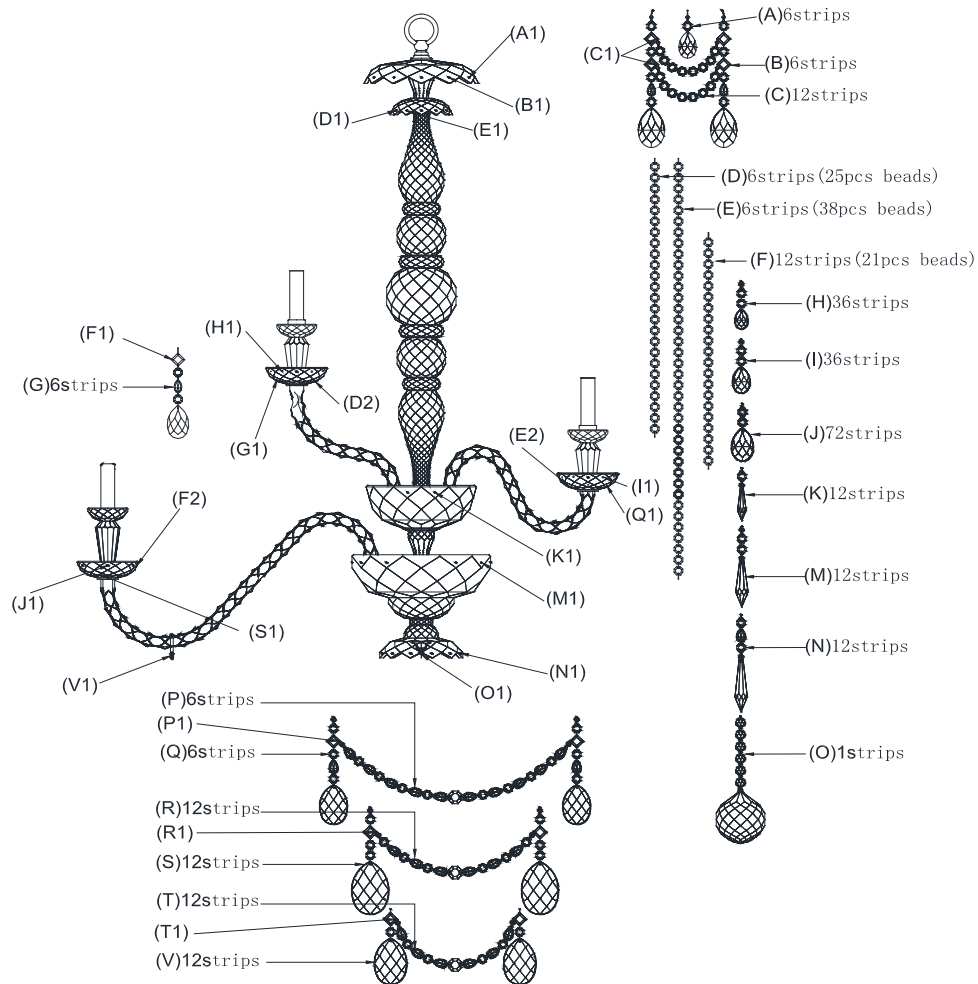

Daniela 24-Light Chandelier

Item # RL 5010

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

40. Attach the crystal drops (J) on hook (J1).
41. Attach the crystal drops (K) on hook (K1).
42. Attach the crystal drops (M) on hook (M1).
43. Attach the crystal drops (N) on hook (N1).
44. Attach the crystal drop (O) on hook (O1).
45. Attach the crystal drops (Q) on hook (Q1).
46. Attach the crystal drops (P) on hook (P1).
47. Attach the crystal drops (S) on hook (S1).
48. Attach the crystal drops (R) on hook (R1).
49. Attach the crystal drops (V) on hook (V1).
50. Attach the crystal drops (T) on hook (T1).
51. Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



RALPH LAUREN